


CALVARY EPISCOPAL CHURCH
CELEBRATION PLAZA & PARKING STRUCTURE
818 14TH ST
SITE PLAN

LOTS 1, 2, 11, AND 12, BLOCK 33 AND LOTS 7-A, 7-B, 8-A, 8-B, 9-A, 9-B, 10, 11, AND 12-A, BLOCK 32, SOUTH GOLDEN, LOCATED IN THE NORTHWEST QUARTER OF SECTION 34, TOWNSHIP 3 SOUTH, RANGE 70 WEST OF THE 6TH P.M., CITY OF GOLDEN, COUNTY OF JEFFERSON, STATE OF COLORADO



280 SOUTH PENNSYLVANIA
DENVER, COLORADO 80209
PH: 303.788.1717 FAX: 303.788.1964



455 Sherman Street, Suite 160
Denver, Colorado 80203
voice: (303) 447-0090
fax: (303) 447-9141
www.collinsengr.com

OWNER:
CALVARY EPISCOPAL CHURCH
1320 ARAPAHOE ST
GOLDEN, CO 80401
PHONE:
CONTACT: ROD KILLIAN

ARCHITECT:
ARCHITECTURE WORKSHOP
280 PENNSYLVANIA ST
DENVER, CO 80209
PHONE: (303) 788-1717
CONTACT: JOE MARSHALL


LANDSCAPE ARCHITECT:
CVITAS
1200 BANNOCK ST
DENVER, CO 80204
PHONE: (303) 571-0053
CONTACT: CRAIG VICKERS

CIVIL ENGINEER:
COLLINS ENGINEERS, INC.
455 SHERMAN STREET, SUITE 160
DENVER, CO 80203
PHONE: (303) 447-0090
FAX: (303) 447-9141
CONTACT: BRYAN FRANTZ
EMAIL: bfrantz@collinsengr.com

SURVEY:
FLATIRONS
3825 IRIS AVE, STE 395
BOULDER, CO 80301
PHONE: (303) 443-7001 EXT. 183
CONTACT: BOB LUND

GEOTECHNICAL:
CESARE, INC.
7108 SOUTH ALTON WAY, BUILDING B
CENTENNIAL, CO 80112
PHONE: (303) 220-0300
CONTACT: K. CRAIG VAUGHN

STRUCTURAL:
FORTIS STRUCTURAL
7995 E. PRENTICE AVE, SUITE 201-E
GREENWOOD VILLAGE, CO 80111
PHONE: (720) 593-3800

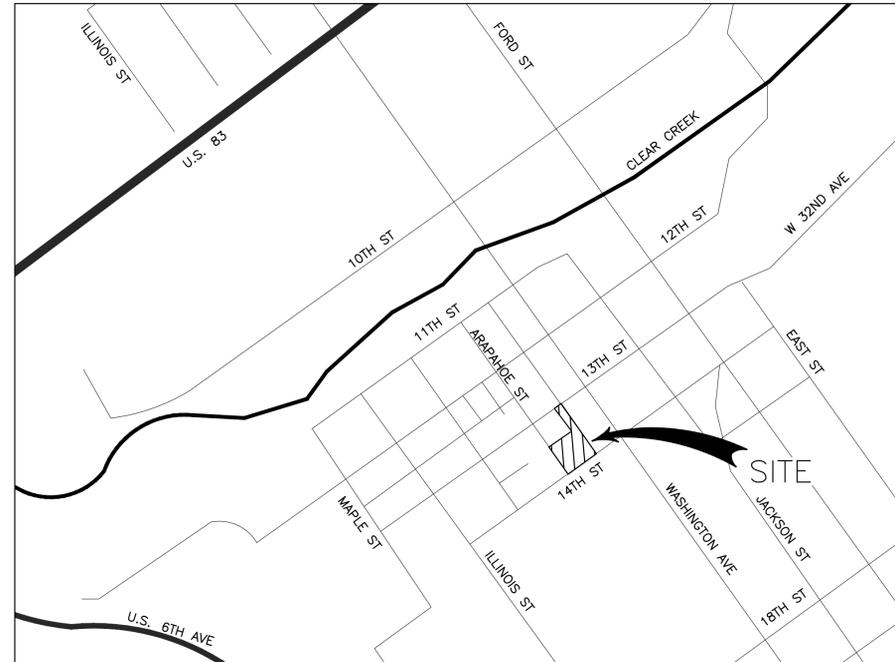

VICINITY MAP
SCALE 1" = 500'

SHEET INDEX:

C0.0	COVER SHEET
C1.0	DEMOLITION PLAN
C2.0	SITE PLAN
C2.1	SITE PLAN - UPPER GARAGE LEVEL
C3.0	GRADING & DRAINAGE PLAN
C4.0	STREET CROSS-SECTIONS
C5.0	UTILITY PLAN
L1.0	LANDSCAPE LAYOUT PLAN
L2.1	LANDSCAPE DETAILS
L3.0	PLANTING PLAN
L3.1	PLANTING DETAILS
SP1.0	SITE PHOTOMETRICS PLAN
SP1.1	FIXTURE CUT SHEETS
A1.0	ARCHITECTURAL ELEVATIONS

SITE PLANNING & ZONING:
CITY OF GOLDEN
1445 10TH STREET
GOLDEN, CO 80401
PHONE: (303) 384-8097
CONTACT: RICK MURBY

STORM DRAINAGE:
CITY OF GOLDEN
PUBLIC WORKS DEPARTMENT
1445 10TH STREET
GOLDEN, CO 80401
PHONE: (303) 384-8156
CONTACT: JOE PUHR

WATER/SANITARY SEWER:
CITY OF GOLDEN
WATER DIVISION
1445 10TH STREET
GOLDEN, CO 80401
PHONE: (303) 384-8153
CONTACT: JOE PUHR

FIRE DEPARTMENT:
CITY OF GOLDEN
FIRE DEPARTMENT
911 10TH STREET
GOLDEN, CO 80401
PHONE: (303) 384-8094
CONTACT: JERRY STRICKER

POWER:
XCEL ENERGY
5460 W. 60TH AVENUE
ARVADA, CO 80003
PHONE: (303) 425-3848
CONTACT:

GAS:
XCEL ENERGY
5460 W. 60TH AVENUE
ARVADA, CO 80003
PHONE: (303) 425-3848
CONTACT:

TELEPHONE:
CENTURYLINK
7759 SOUGH WHEELING COURT
CENTENNIAL, CO 80112
PHONE: (970) 490-7500
CONTACT:

SITE DATA:

TOTAL AREA OF PROPERTY:	25,540 SQ. FT		
ARAPAHOE ST (ROW CELEBRATION PLAZA)	10,530 SQ. FT		
PARKING STRUCTURE	15,010 SQ. FT		
BUILDING COVERAGE:	15,010 SQ. FT		
PARKING LOT COVERAGE:	6,311 SQ. FT		
PARKING LOT LANDSCAPE AREA:	213 SQ. FT		
TOTAL LANDSCAPE AREA COVERAGE:			
REQUIRED	35	PROVIDED	35
6,385 SQ. FT		6,718 SQ. FT	
PARKING SPACES:			
EXISTING ARMORY	35	PROVIDED ARMORY*	35
EXISTING PARKING LOTS	39	PROVIDED GARAGE	86

* THE OWNER WILL PROVIDE THE ARMORY DEDICATED SPACES WITHIN THE PARKING GARAGE UP TO THE CURRENT NUMBER OF EXISTING ARMORY PARKING SPACES PROVIDED.

SIGNATURES:

CITY OF GOLDEN PLANNING COMMISSION
APPROVED BY THE CITY OF GOLDEN PLANNING COMMISSION
THIS _____ DAY OF _____ 2018.

CHAIRMAN _____

SECRETARY _____

OWNERSHIP CERTIFICATE
SIGNED THIS _____ DAY OF _____ 2018.

BY _____
NOTARIAL
STATE OF _____
COUNTY OF _____
THE FOREGOING SIGNATURE WAS ACKNOWLEDGED BEFORE ME
THIS _____ DAY OF _____ 2018.

CALVARY EPISCOPAL CHURCH
CELEBRATION PLAZA / PARKING STRUCTURE
818 14th STREET
GOLDEN, CO 80401

ISSUE	DATE	DESCRIPTION
1	02.02.2018	SDP
2	03.26.2018	SDP RESUBMITAL


DRAWN BY: SR CHECKED BY: BMF
PROJECT NO.: 1715 CP INITIAL DATE: MAR 2018

COVER SHEET

C0.0

LEGEND

EXISTING	REMOVAL
	PROPERTY LINE
	CURB & GUTTER
	EASEMENTS/ SETBACKS
	CONCRETE
	ASPHALT
	BALLARD
	STORM SEWER INLET
	MANHOLE
	SANITARY SEWER
	FIRE HYDRANT
	SIGN
	OVERHEAD UTILITIES
	WATER LINE
	ELECTRIC LINE
	GAS LINE

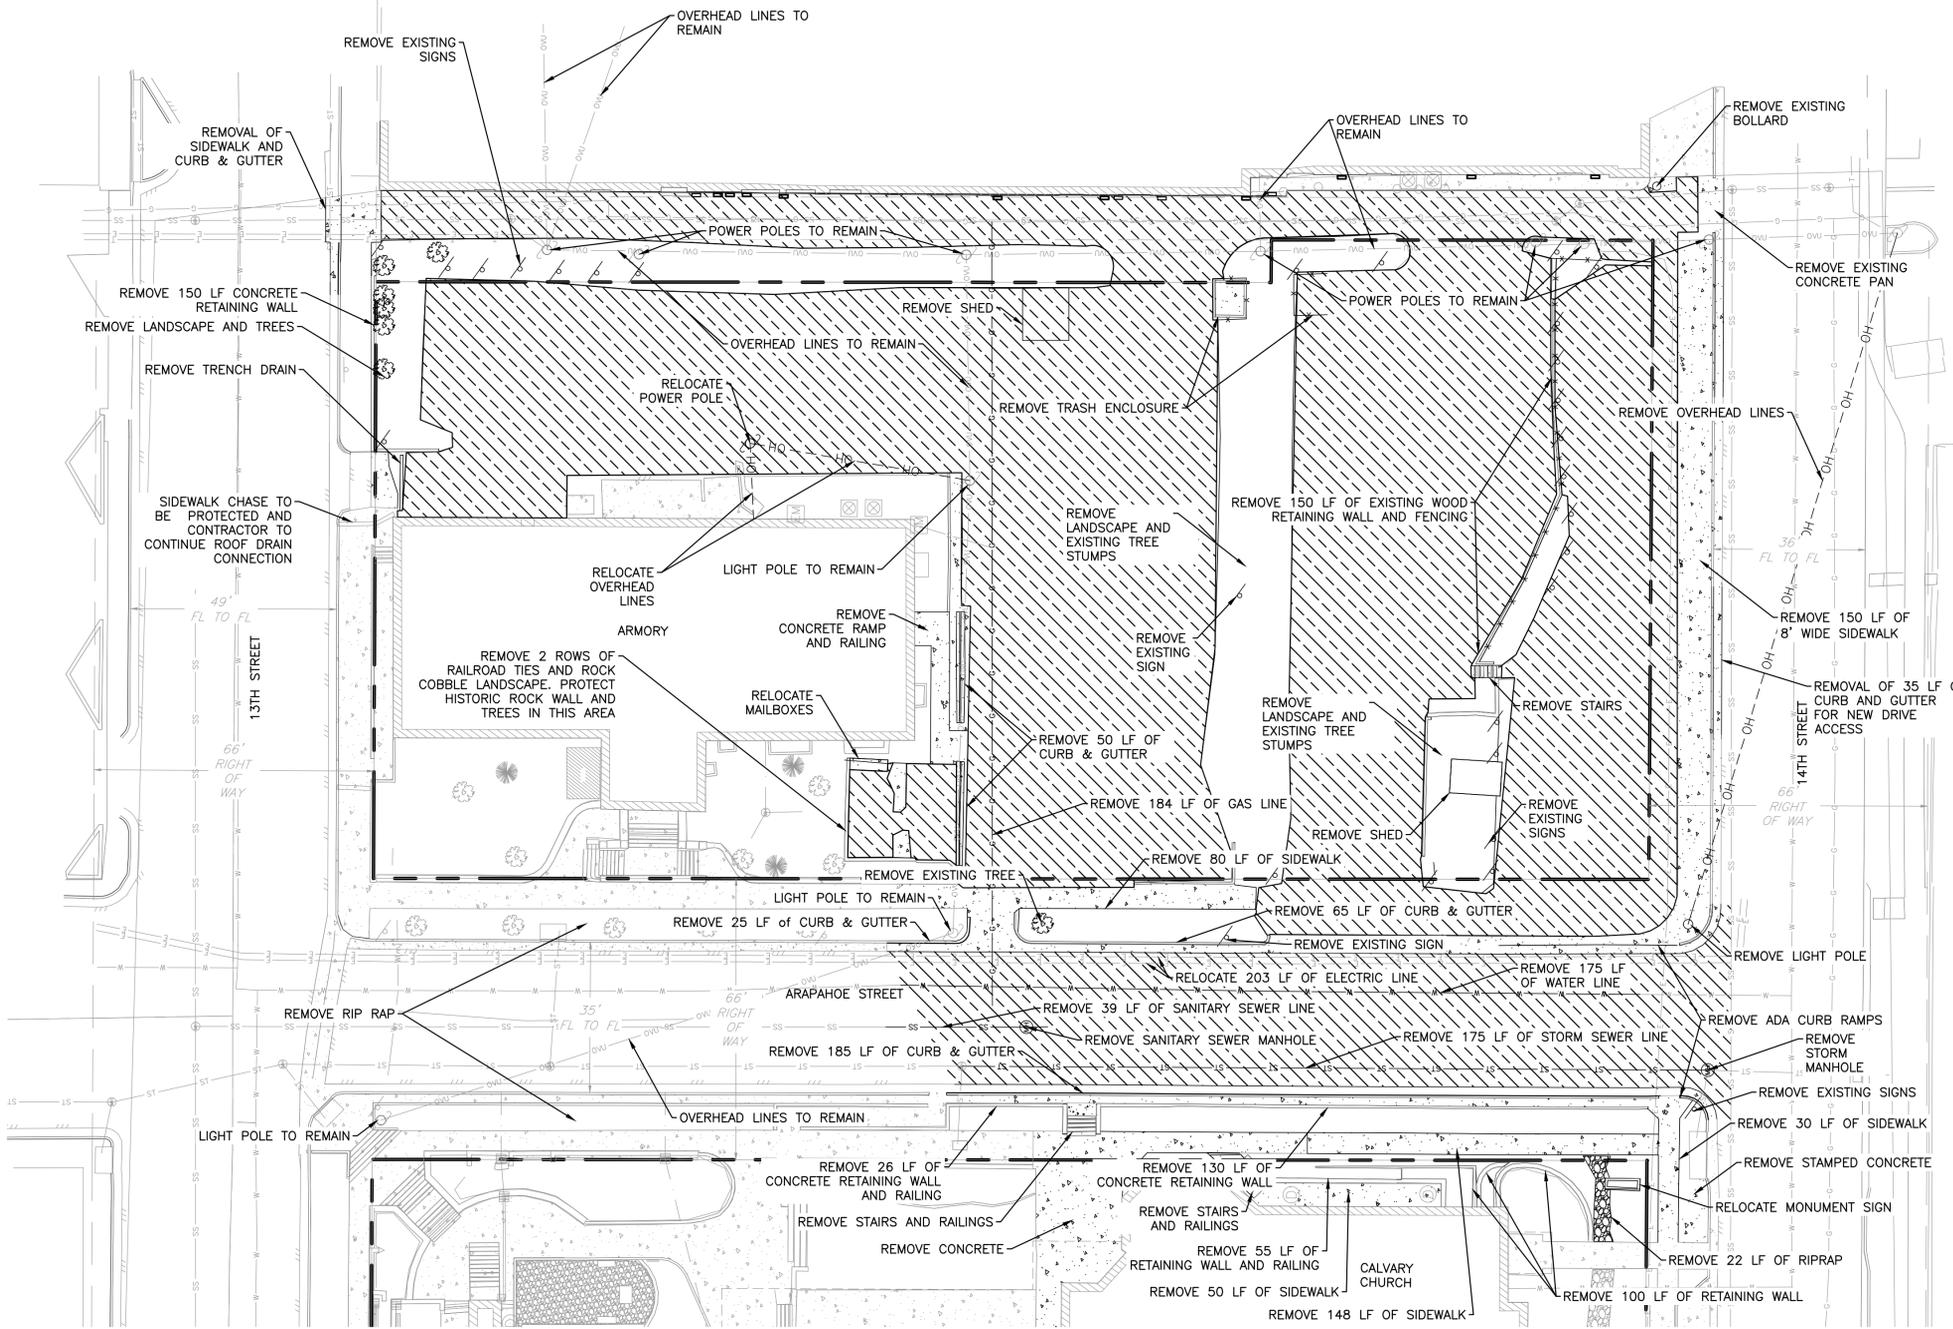



CALVARY EPISCOPAL CHURCH
CELEBRATION PLAZA / PARKING STRUCTURE
818 14th STREET
GOLDEN, CO 80401

ISSUE	DATE	DESCRIPTION
1	02.02.2018	SDP
2	03.26.2018	SDP RESUBMITTAL

DRAWN BY: SR CHECKED BY: BMF
PROJECT NO.: 1715 CP INITIAL DATE: MAR 2018

DEMOLITION PLAN






KEY MAP
SCALE: 1"=500'


LEGEND

- PROPERTY LINE
- - - RIGHT-OF-WAY LINE
- - - EXISTING EASEMENTS
- - - PROPOSED EASEMENTS
- 5910 EXISTING CONTOURS
- 5909 EXISTING CONTOURS
- 5910 PROPOSED CONTOURS
- 5909 PROPOSED CONTOURS
- EXISTING CURB & GUTTER
- PROPOSED CATCH CURB & GUTTER
- PROPOSED SPILL CURB & GUTTER
- EXISTING CONCRETE
- PROPOSED CONCRETE
- EXISTING SIGN
- PROPOSED SIGN
- PERIMETER DRAIN
- CLEANOUT
- EXISTING STORM SEWER
- PROPOSED STORM SEWER
- EXISTING SANITARY SEWER
- PROPOSED SANITARY SEWER
- EXISTING WATER LINES
- PROPOSED WATER LINES
- EXISTING ELECTRIC
- EXISTING GAS
- EXISTING MANHOLE
- PROPOSED MANHOLE
- EXISTING TYPE R INLET
- PROPOSED INLET
- PROPOSED AREA INLET
- EXISTING FIRE HYDRANT

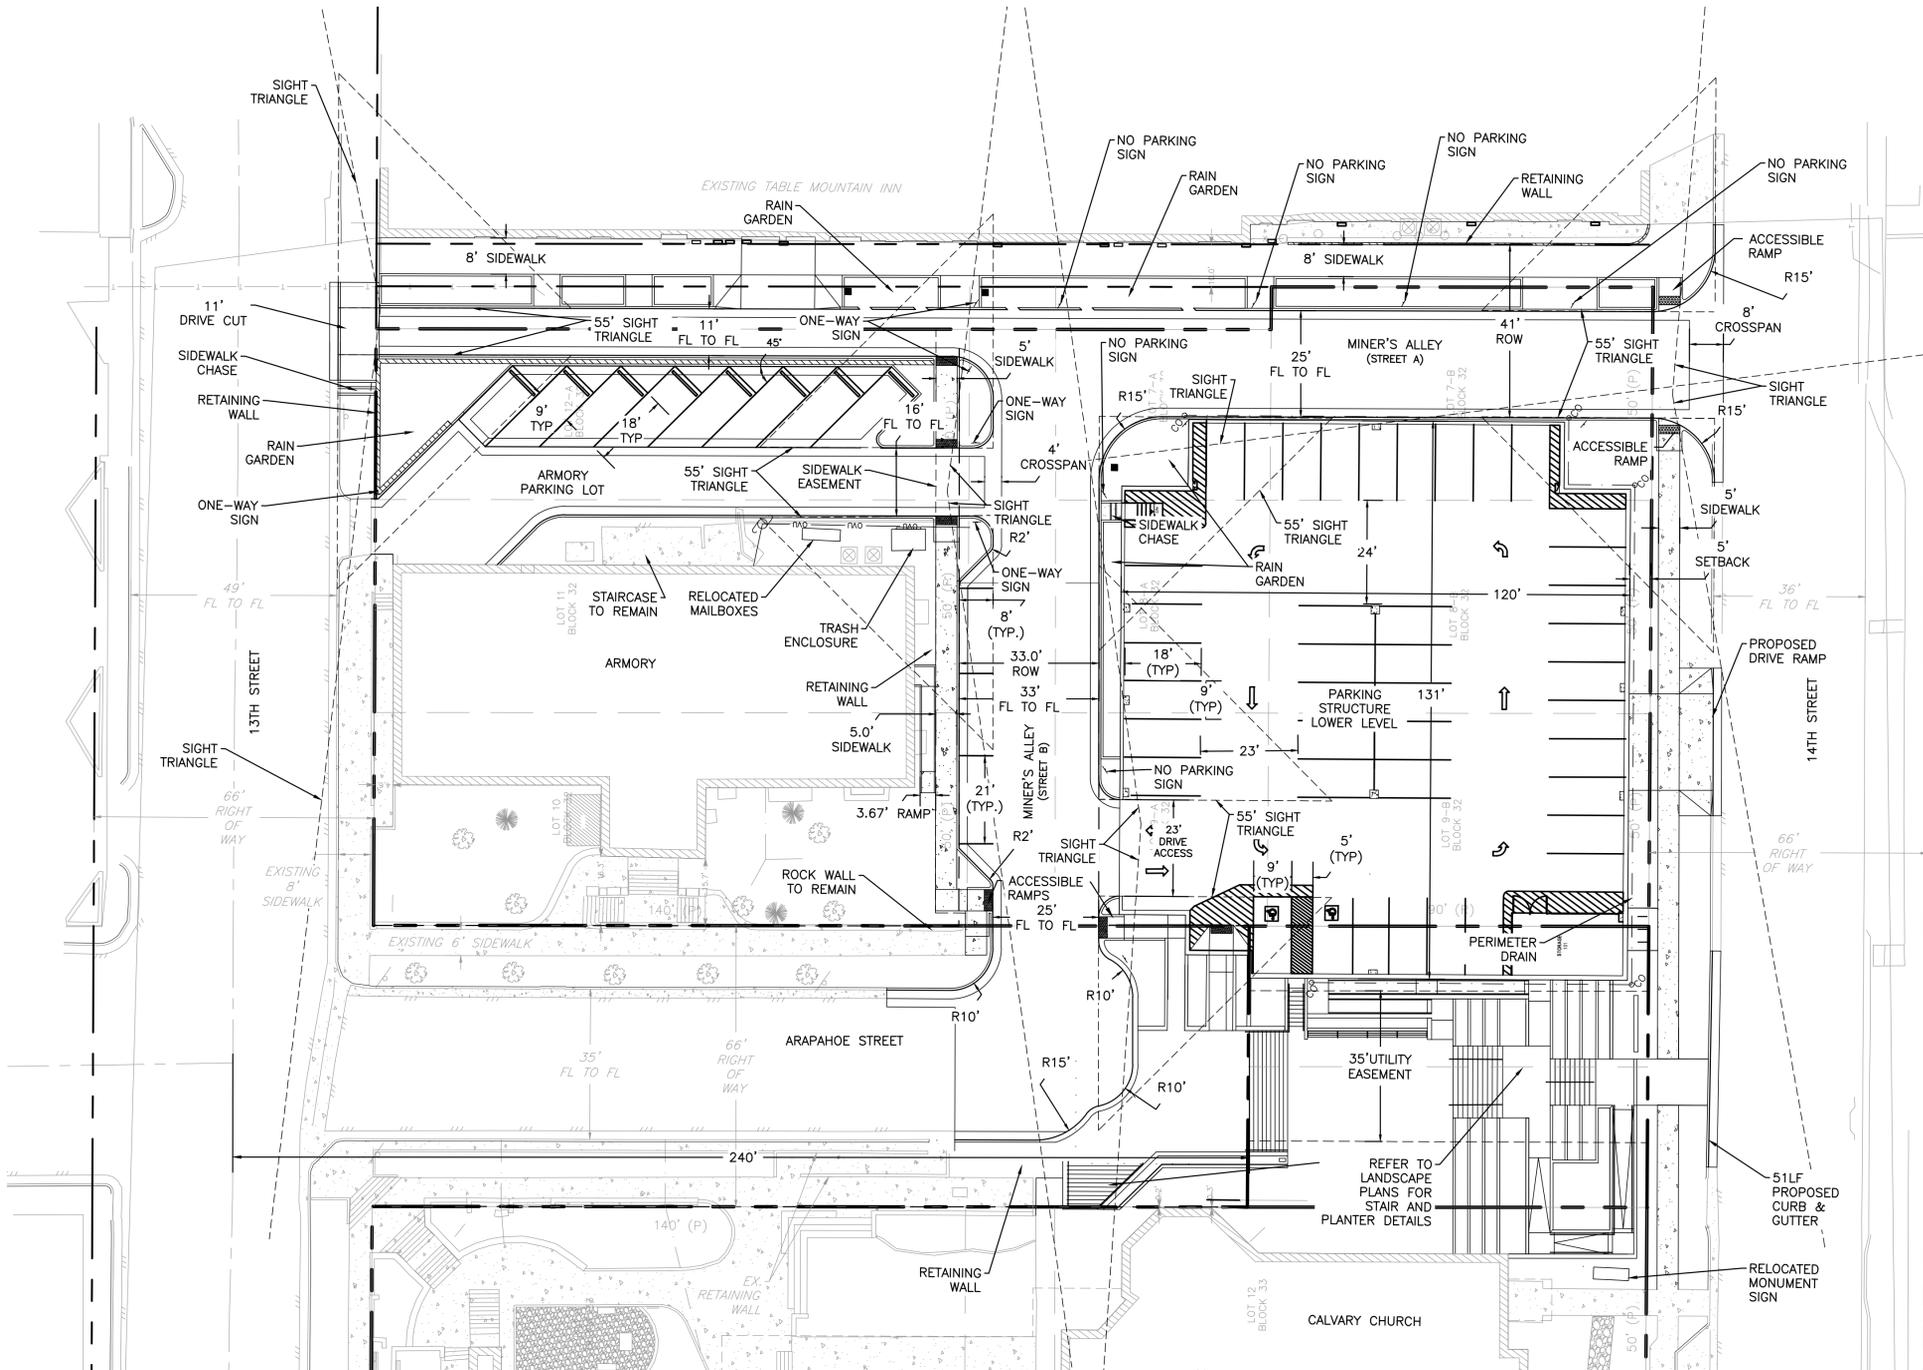

NOTES:
1. ALL RADIUS' ARE 5' UNLESS OTHERWISE SPECIFIED

BASIS OF BEARINGS: AN ASSUMED BEARING OF N35°50'04"W ALONG THE WEST LINE OF LOTS 2 AND 11, BLOCK 33, BETWEEN A FOUND NO. 5 REBAR WITH 1 1/2" ALUMINUM CAP "IRA HARDIN LS 5239" AT THE SOUTHWEST CORNER OF LOT 11 AND A FOUND 1" STEEL TAG "RENS 9489" AT THE NORTHWEST CORNER OF LOT 2 AS SHOWN HEREON. ALL BEARINGS SHOWN HEREON ARE RELATIVE THERETO.




CALVARY EPISCOPAL CHURCH
CELEBRATION PLAZA / PARKING STRUCTURE
818 14th STREET
GOLDEN, CO 80401

ISSUE	DATE	DESCRIPTION
1	02.02.2018	SDP
2	03.26.2018	SDP RESUBMITTAL


DRAWN BY: SR CHECKED BY: BMF
PROJECT NO.: 1715 CP INITIAL DATE: MAR 2018

SITE PLAN

C2.0

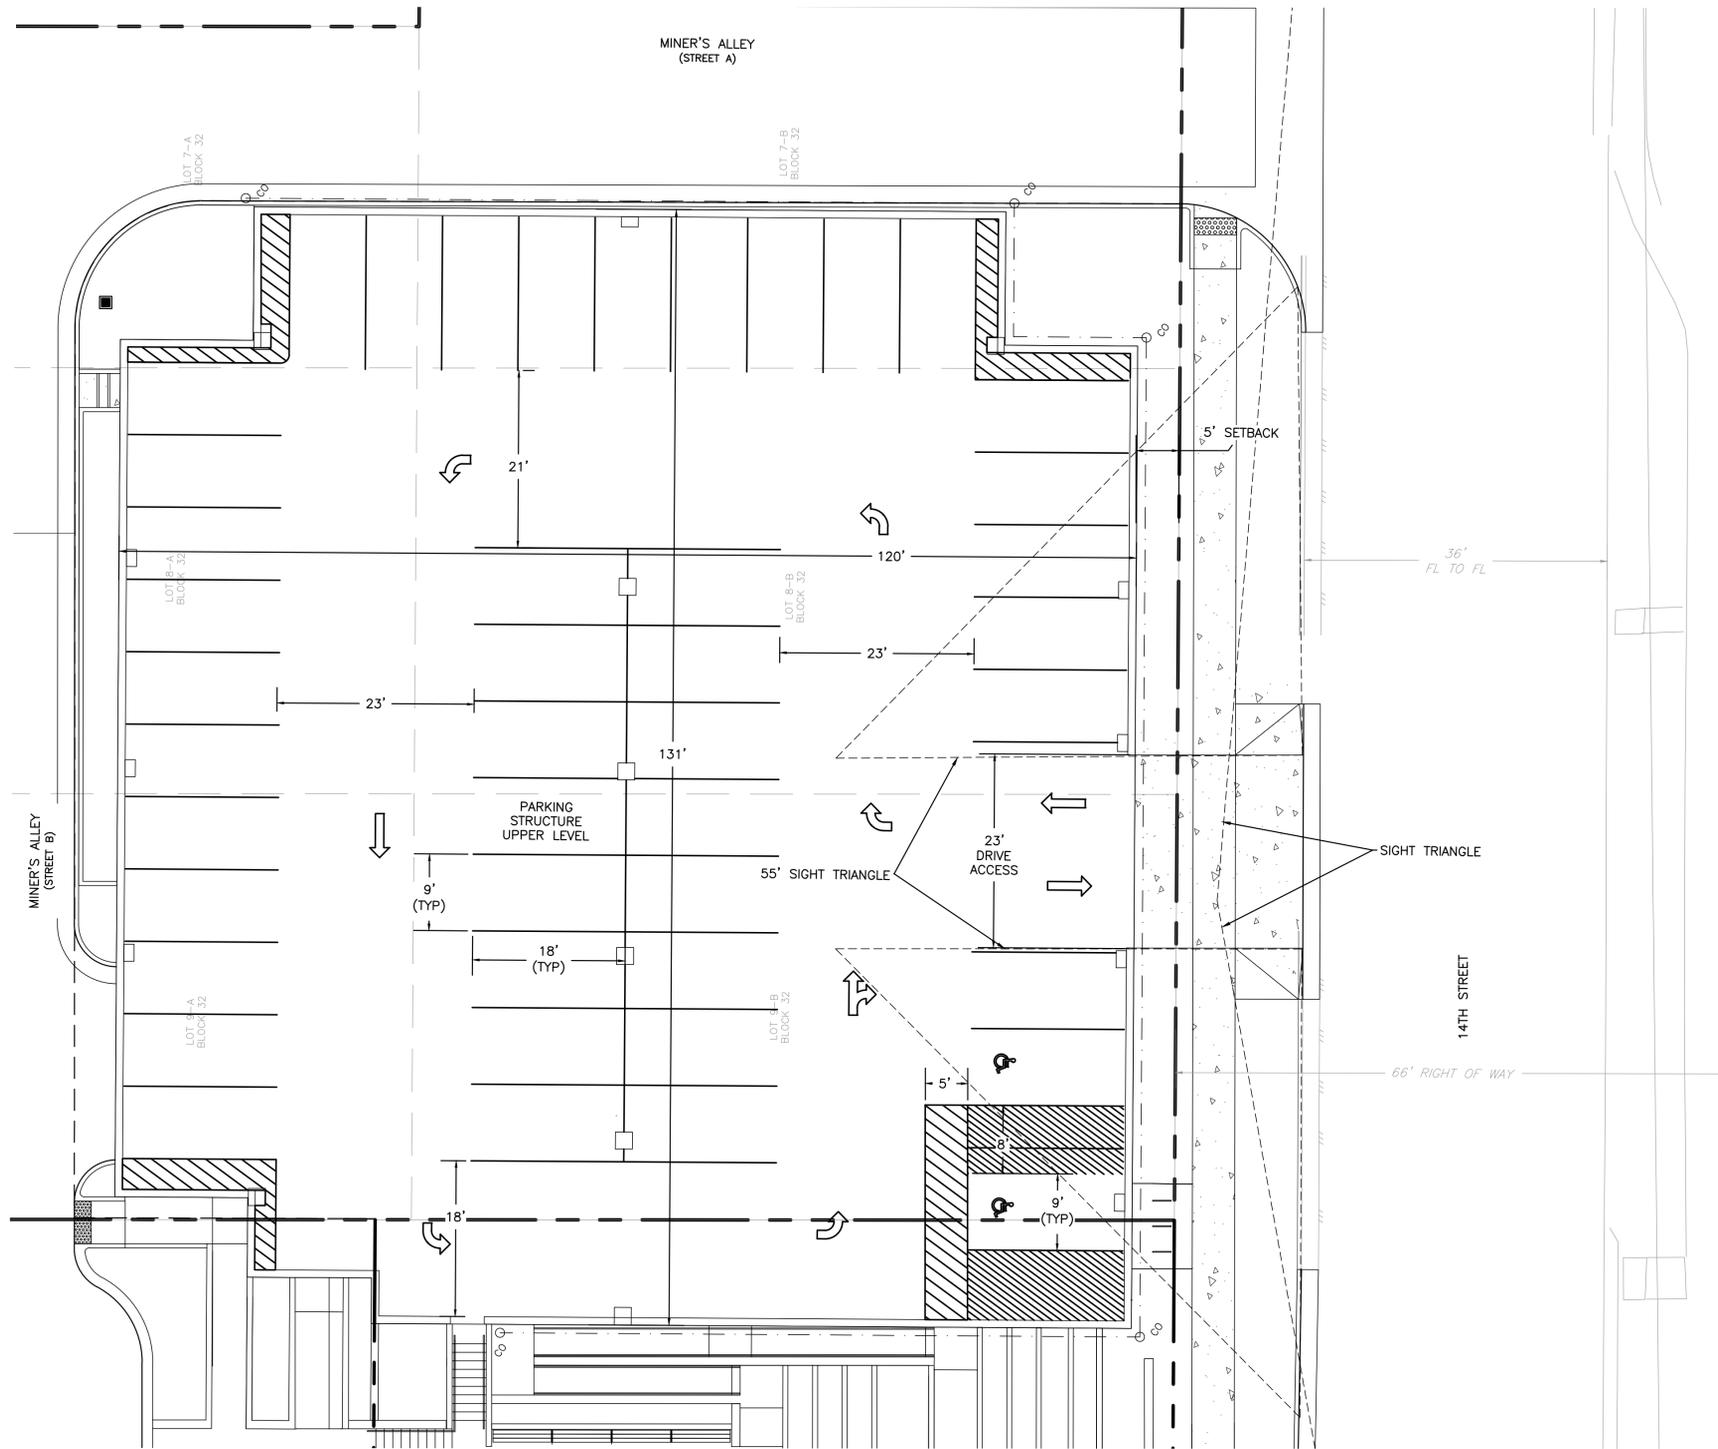


PARKING GARAGE - UPPER LEVEL

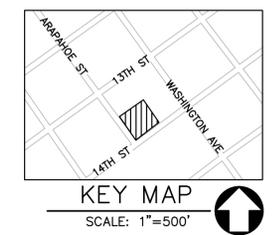

LEGEND

- PROPERTY LINE
- - - RIGHT-OF-WAY LINE
- - - EXISTING EASEMENTS
- - - PROPOSED EASEMENTS
- - - 5910 EXISTING CONTOURS
- - - 5909
- - - 5910 PROPOSED CONTOURS
- - - 5909
- EXISTING CURB & GUTTER
- PROPOSED CATCH CURB & GUTTER
- PROPOSED SPILL CURB & GUTTER
- EXISTING CONCRETE
- PROPOSED CONCRETE
- EXISTING SIGN
- PROPOSED SIGN
- PERIMETER DRAIN
- CLEANOUT
- ST --- EXISTING STORM SEWER
- PROPOSED STORM SEWER
- SS --- EXISTING SANITARY SEWER
- PROPOSED SANITARY SEWER
- W --- EXISTING WATER LINES
- W --- PROPOSED WATER LINES
- E --- EXISTING ELECTRIC
- G --- EXISTING GAS
- (MH) --- EXISTING MANHOLE
- (MH) --- PROPOSED MANHOLE
- EXISTING TYPE R INLET
- PROPOSED INLET
- PROPOSED AREA INLET
- EXISTING FIRE HYDRANT

BASIS OF BEARINGS: AN ASSUMED BEARING OF N35°50'04"W ALONG THE WEST LINE OF LOTS 2 AND 11, BLOCK 33, BETWEEN A FOUND NO. 5 REBAR WITH 1 1/2" ALUMINUM CAP "IRA HARDIN LS 5239" AT THE SOUTHWEST CORNER OF LOT 11 AND A FOUND 1" STEEL TAG "RENS 9489" AT THE NORTHWEST CORNER OF LOT 2 AS SHOWN HEREON. ALL BEARINGS SHOWN HEREON ARE RELATIVE THERETO.



280 SOUTH PENNSYLVANIA
DENVER, COLORADO 80209
PH: 303.788.1717 FAX: 303.788.1964




CALVARY EPISCOPAL CHURCH
CELEBRATION PLAZA / PARKING STRUCTURE
818 14th STREET
GOLDEN, CO 80401

ISSUE	DATE	DESCRIPTION
1	02.02.2018	SDP
2	03.26.2018	SDP RESUBMITTAL

DRAWN BY: SR CHECKED BY: BMF
PROJECT NO.: 1715 CP INITIAL DATE: MAR 2018

SITE PLAN -
PARKING GARAGE
UPPER LEVEL

C2.1

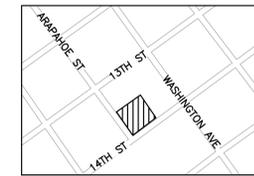


KEY MAP

SCALE: 1"=500'

LEGEND

EXISTING	PROPOSED
	PROPERTY LINE
	CURB & GUTTER
	SPILL CURB & GUTTER
	EASEMENTS/ SETBACKS
	BUILDINGS
	CONTOURS
	CONCRETE
	SANITARY SEWER
	WATER LINE
	ELECTRIC
	GAS
	BALLARD
	STORM SEWER INLET
	MANHOLE
	CLEAN OUT
	FIRE HYDRANT
	SIGN
	SLOPE
	FLOW ARROW

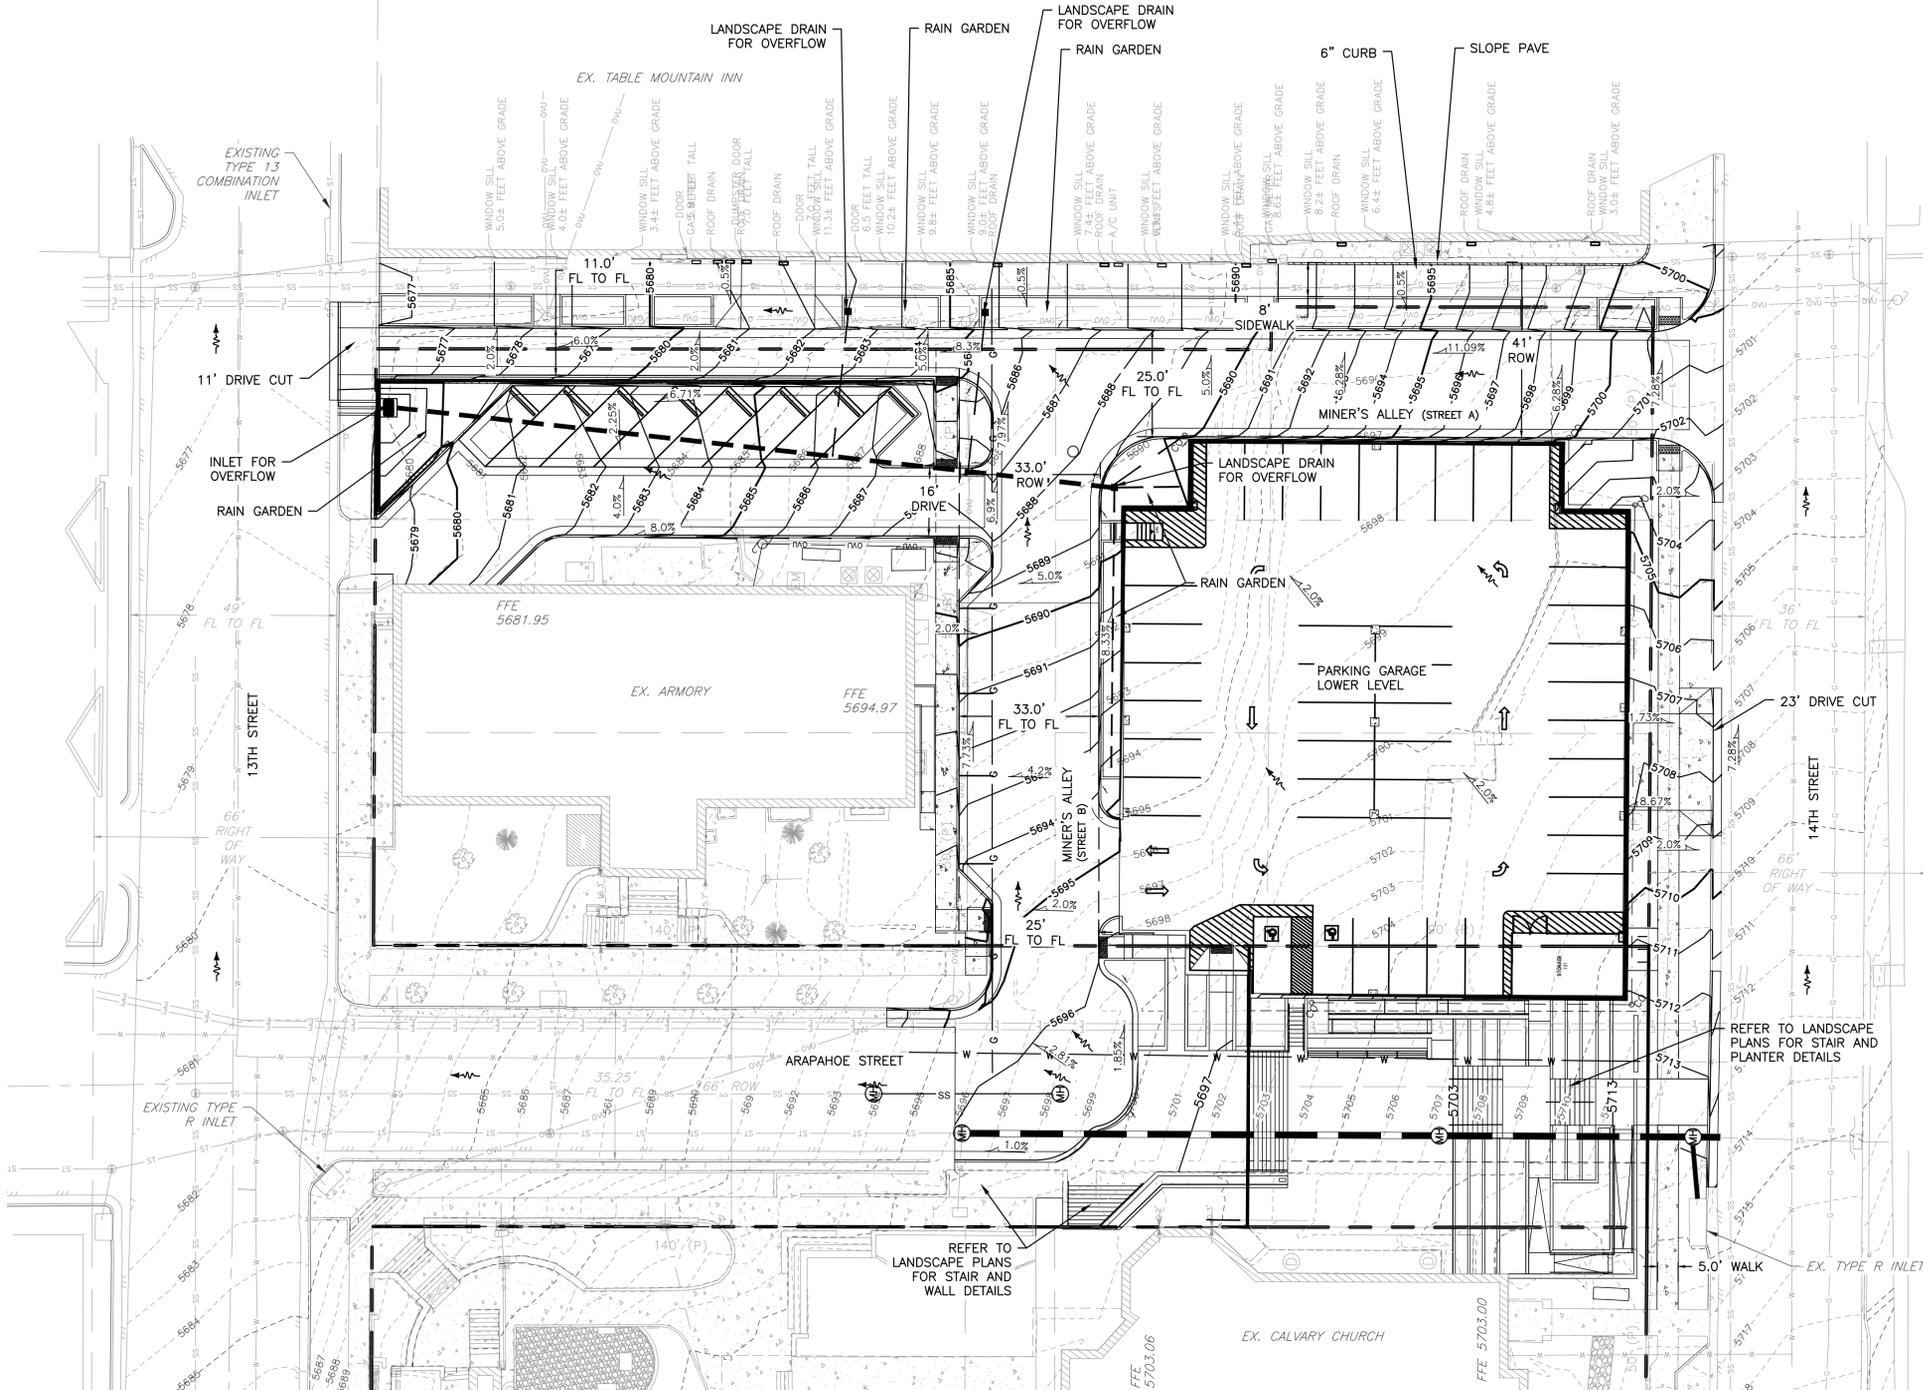


BENCHMARK:
ELEVATIONS BASED ON NGS POINT G 31, WITH A PUBLISHED ELEVATION OF 5677.71 FEET (NAVD88), BEING A BENCHMARK DISK LOCATED AT THE INTERSECTION OF 12TH ST. AND WASHINGTON AVE.

BASIS OF BEARINGS
AN ASSUMED BEARING OF N35°50'04"W ALONG THE WEST LINE OF LOTS 2 AND 11, BLOCK 33, BETWEEN A FOUND NO. 5 REBAR WITH 1 1/2" ALUMINUM CAP "IRA HARDIN LS 5239" AT THE SOUTHWEST CORNER OF LOT 11 AND A FOUND 1" STEEL TAG "RENS 9489" AT THE NORTHWEST CORNER OF LOT 2 AS SHOWN HEREON. ALL BEARINGS SHOWN HEREON ARE RELATIVE THERETO.

- GENERAL NOTES:**
1. GRADING PLAN IS FOR ROUGH GRADING ONLY. CHANGES MAY BE NECESSARY TO BRING PLAN INTO CONFORMANCE WITH APPROVED FINAL DRAINAGE PLAN AND SITE PLAN.
 2. A WATER TRUCK SHALL BE MADE AVAILABLE WITHIN 24 HOURS OF CITY INSPECTOR'S REQUEST FOR DUST CONTROL ON SITE.
 3. ANY SETTLEMENT OR SOIL ACCUMULATIONS BEYOND THE PROPERTY LIMITS DUE TO GRADING OR EROSION SHALL BE REPAIRED IMMEDIATELY BY THE CONTRACTOR.
 4. NO GRADING SHALL TAKE PLACE IN SPECIAL FLOOD HAZARD AREAS UNTIL THE FINAL DRAINAGE PLAN, DRAINAGE REPORT, AND/OR FLOODPLAIN DEVELOPMENT PERMIT HAVE BEEN APPROVED AND ALL APPROPRIATE PERMITS HAVE BEEN OBTAINED.
 5. ANY CONSTRUCTION DEBRIS OR MUD TRACKING IN THE PUBLIC RIGHT-OF-WAY RESULTING FROM THIS DEVELOPMENT SHALL BE REMOVED IMMEDIATELY BY THE CONTRACTOR.
 6. THE CONTRACTOR SHALL IMMEDIATELY FIX ANY EXCAVATIONS OR EXCESSIVE PAVEMENT FAILURES CAUSED BY THE DEVELOPMENT AND SHALL PROPERLY BARRICADE THE SITE UNTIL CONSTRUCTION IS COMPLETE. FAILURE BY THE CONTRACTOR TO CORRECT ANY OF THE ABOVE WITHIN 48 HOURS OF WRITTEN OR VERBAL NOTICE BY THE CITY SHALL CAUSE THE CITY TO ISSUE A STOP WORKORDER AND/OR DO THE WORK AND MAKE A CLAIM AGAINST THE PERMIT GUARANTEE FOR ANY COST INCURRED BY THE CITY.
 7. AREAS BEING DISTURBED BY THE GRADING SHALL BE RESEED WITH NATIVE VEGETATION OR AS APPROVED ON THE DEVELOPMENT PLAN.

8. A STORMWATER PERMIT IS REQUIRED PRIOR TO ISSUANCE OF ANY GRADING PERMIT.
9. IT SHALL BE THE RESPONSIBILITY OF THE DEVELOPER DURING CONSTRUCTION ACTIVITIES TO RESOLVE ANY CONSTRUCTION PROBLEMS DUE TO CHANGED CONDITIONS OR DESIGN ERRORS ENCOUNTERED BY THE CONTRACTOR DURING THE PROGRESS OF ANY PORTION OF THE PROPOSED WORK. IF, IN THE OPINION OF THE CITY'S INSPECTOR, THE MODIFICATIONS PROPOSED BY THE DEVELOPER TO THE APPROVED PLANS INVOLVE SIGNIFICANT CHANGES TO THE CHARACTER OF THE WORK OR TO CONTIGUOUS PUBLIC OR PRIVATE IMPROVEMENTS, THE DEVELOPER SHALL BE RESPONSIBLE FOR SUBMITTING REVISED PLANS TO THE CITY OF GOLDEN FOR APPROVAL PRIOR TO ANY FURTHER CONSTRUCTION RELATED TO THAT PORTION OF THE WORK. ANY IMPROVEMENTS CONSTRUCTED NOT IN ACCORDANCE WITH THE APPROVED PLANS, OR THE APPROVED REVISED PLANS, SHALL BE REMOVED AND THE IMPROVEMENTS SHALL BE RECONSTRUCTED ACCORDING TO THE APPROVED PLANS AT THE CONTRACTOR'S EXPENSE.
10. THE CONTRACTOR SHALL BE SOLELY AND COMPLETELY RESPONSIBLE FOR CONDITIONS AT AND ADJACENT TO THE JOB SITE, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY DURING PERFORMANCE OF THE WORK THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS.
11. THE DUTY OF THE CITY TO CONDUCT CONSTRUCTION REVIEW OF THE CONTRACTOR'S PERFORMANCE IS NOT INTENDED TO INCLUDE REVIEW OF THE ADEQUACY OF THE CONTRACTOR'S SAFETY MEASURES IN, ON, OR NEAR THE CONSTRUCTION SITE.
12. CONTRACTOR SHALL CONTACT THE UTILITY NOTIFICATION CENTER OF COLORADO FOR LOCATION OF EXISTING UNDERGROUND UTILITIES AT LEAST 48 HOURS PRIOR TO COMMENCEMENT OF CONSTRUCTION.
13. A CITY OF GOLDEN STREET ACTIVITY PERMIT, STREET CUT PERMIT, AND/OR CURB/GUTTER/SIDEWALK PERMIT MAY BE REQUIRED IN CONJUNCTION WITH A GRADING PERMIT.



Approved For One Year From This Date

City Engineer	Date
Fire Department	Date
Water Department	Date


CALVARY EPISCOPAL CHURCH
CELEBRATION PLAZA / PARKING STRUCTURE
818 14th STREET
GOLDEN, CO 80401

ISSUE	DATE	DESCRIPTION
1	02.02.2018	SDP
2	03.26.2018	SDP RESUBMITAL


DRAWN BY: SR CHECKED BY: BMF
PROJECT NO.: 1715 CP INITIAL DATE: MAR 2018

GRADING & DRAINAGE PLAN


C3.0

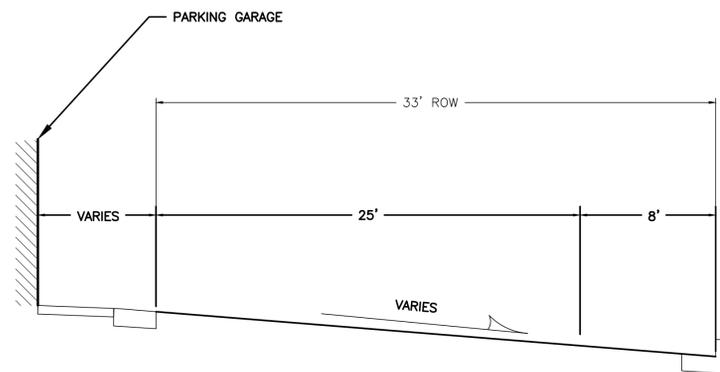

MINER'S ALLEY (STREET B) TYPICAL CROSS-SECTION

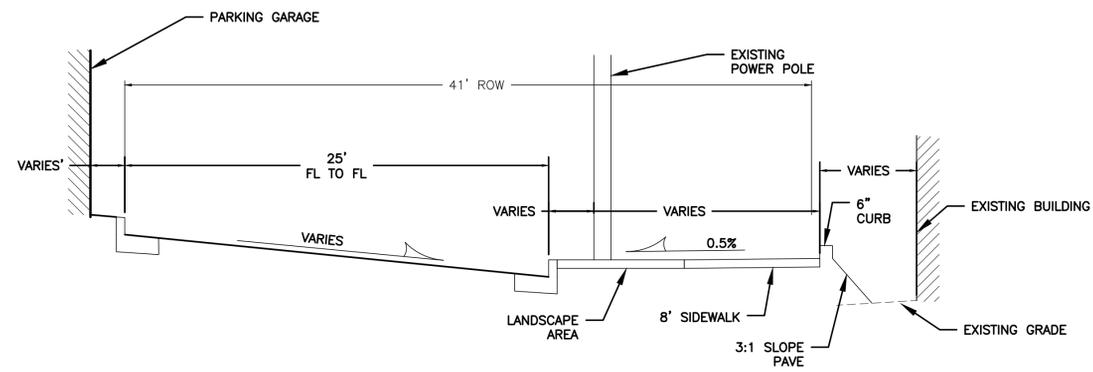

MINER'S ALLEY (STREET A) TYPICAL CROSS-SECTION



aw

architectural
WORKSHOP

280 SOUTH PENNSYLVANIA
DENVER, COLORADO 80209
PH: 303.788.1717 FAX: 303.788.1964

COLLINS
ENGINEERS

455 Sherman Street, Suite 160
Denver, Colorado 80203
voice: (303) 447-0090
fax: (303) 447-9141
www.collinsengr.com

BENCHMARK:
ELEVATIONS BASED ON NGS POINT G 31, WITH A PUBLISHED
ELEVATION OF 5677.71 FEET (NAVD88), BEING A
BENCHMARK DISK LOCATED AT THE INTERSECTION OF 12TH
ST. AND WASHINGTON AVE.

BASIS OF BEARINGS
AN ASSUMED BEARING OF N35°50'04"W ALONG THE WEST LINE OF LOTS 2 AND 11,
BLOCK 33, BETWEEN A FOUND NO. 5 REBAR WITH 1 1/2" ALUMINUM CAP "IRA HARDIN
LS 5239" AT THE SOUTHWEST CORNER OF LOT 11 AND A FOUND 1" STEEL TAG "RENS
9489" AT THE NORTHWEST CORNER OF LOT 2 AS SHOWN HEREON. ALL BEARINGS
SHOWN HEREON ARE RELATIVE THERETO.

CALVARY EPISCOPAL CHURCH
CELEBRATION PLAZA / PARKING STRUCTURE
818 14th STREET
GOLDEN, CO 80401


ISSUE	DATE	DESCRIPTION
1	02.02.2018	SDP
2	03.26.2018	SDP RESUBMITTAL

Approved For One Year From This Date	
_____ City Engineer	Date
_____ Fire Department	Date
_____ Water Department	Date

DRAWN BY: SR CHECKED BY: BMF
PROJECT NO.: 1715 CP INITIAL DATE: MAR 2018

STREET CROSS
SECTIONS

C4.0

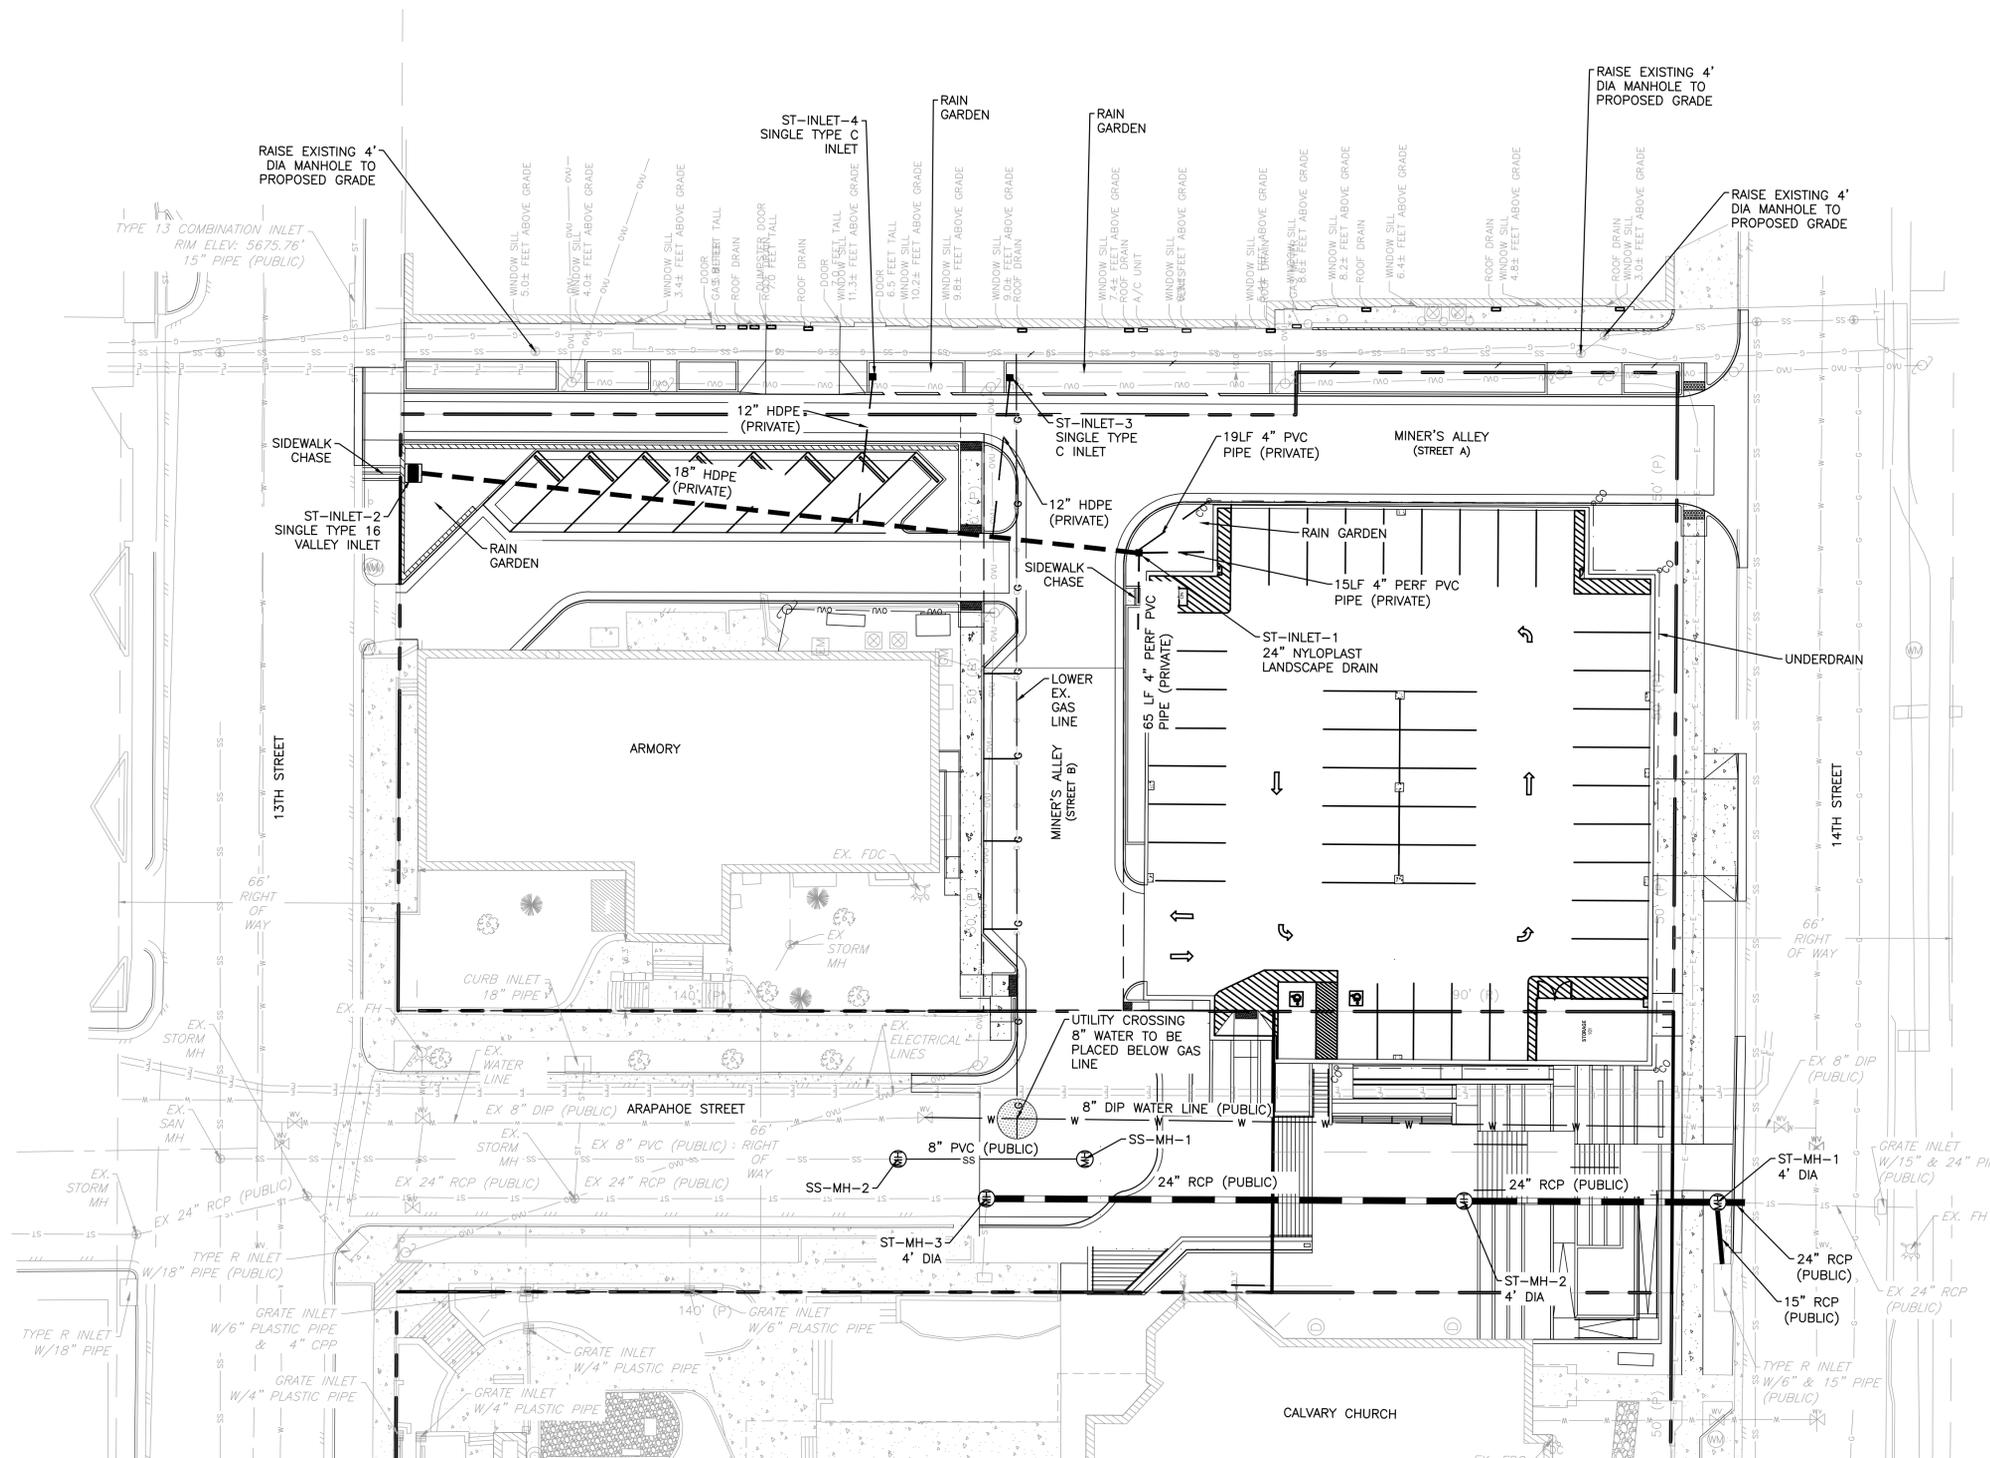

LEGEND

	PROPERTY LINE
	RIGHT-OF-WAY LINE
	EXISTING EASEMENTS
	PROPOSED EASEMENTS
	EXISTING CONTOURS
	PROPOSED CONTOURS
	EXISTING CURB & GUTTER
	PROPOSED CATCH CURB & GUTTER
	PROPOSED SPILL CURB & GUTTER
	EXISTING CONCRETE
	PROPOSED CONCRETE
	EXISTING SIGN
	PROPOSED SIGN
	PERIMETER DRAIN
	CLEANOUT
	EXISTING STORM SEWER
	PROPOSED STORM SEWER
	EXISTING SANITARY SEWER
	PROPOSED SANITARY SEWER
	EXISTING WATER LINES
	PROPOSED WATER LINES
	EXISTING ELECTRIC
	EXISTING GAS
	EXISTING MANHOLE
	PROPOSED MANHOLE
	EXISTING TYPE R INLET
	PROPOSED INLET
	PROPOSED AREA INLET
	EXISTING FIRE HYDRANT
	UTILITY CROSSING

GENERAL NOTES:

- ALL STREET, SANITARY SEWER, STORM SEWER AND WATER CONSTRUCTION SHALL CONFORM TO CITY STANDARDS AND SPECIFICATIONS CURRENT AT DATE OF EXECUTION OF THE DEVELOPMENT AGREEMENT PERTAINING TO THIS DEVELOPMENT. ANY CONSTRUCTION OCCURRING THREE YEARS AFTER THE EXECUTION OF THE DEVELOPMENT AGREEMENT SHALL REQUIRE RE-EXAMINATION OF THE PLANS BY THE DIRECTOR WHO MAY REQUIRE THAT THEY BE MADE TO CONFORM TO STANDARDS AND SPECIFICATIONS CURRENT AT THAT TIME.
- THE TYPE, SIZE, LOCATION, AND NUMBER OF ALL KNOWN UNDERGROUND UTILITIES ARE APPROXIMATE AS SHOWN ON THE DRAWINGS. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY THE EXISTENCE AND LOCATION OF ALL UNDERGROUND UTILITIES ALONG THE ROUTE OF THE WORK. BEFORE COMMENCING NEW CONSTRUCTION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING UNKNOWN UNDERGROUND UTILITIES.
- THESE PLANS HAVE BEEN REVIEWED BY THE CITY FOR CONCEPT ONLY. THE REVIEW DOES NOT IMPLY RESPONSIBILITY BY THE REVIEWING DEPARTMENT, THE CITY ENGINEER, OR THE CITY FOR ACCURACY OR CORRECTNESS OF THE CALCULATIONS. FURTHERMORE, THE REVIEW DOES NOT IMPLY THAT THE QUANTITIES OF THE ITEMS ON THE PLANS ARE THE FINAL QUANTITIES REQUIRED. THE REVIEW SHALL NOT BE CONSTRUED IN ANY REASON AS ACCEPTANCE OF FINANCIAL RESPONSIBILITY BY THE CITY FOR ADDITIONAL QUANTITIES OF ITEMS SHOWN THAT MAY BE REQUIRED DURING THE CONSTRUCTION PHASE.
- MAINTENANCE OF ONSITE DRAINAGE FACILITIES SHALL BE THE RESPONSIBILITY OF THE PROPERTY OWNERS.
- IF FILL OR DREDGED MATERIAL IS DISCHARGED INTO WATERS OF THE UNITED STATES, A USACE 404 PERMIT IS REQUIRED.
- IF CONSTRUCTION AFFECTS ANY COLORADO HIGHWAY, A COLORADO DEPARTMENT OF TRANSPORTATION RIGHT-OF-WAY PERMIT IS REQUIRED.


CALVARY EPISCOPAL CHURCH
CELEBRATION PLAZA / PARKING STRUCTURE
818 14th STREET
GOLDEN, CO 80401


ISSUE	DATE	DESCRIPTION
1	02.02.2018	SDP
2	03.26.2018	SDP RESUBMITAL

DRAWN BY: SR CHECKED BY: BMF
PROJECT NO.: 1715 CP INITIAL DATE: MAR 2018

UTILITY PLAN

C5.0



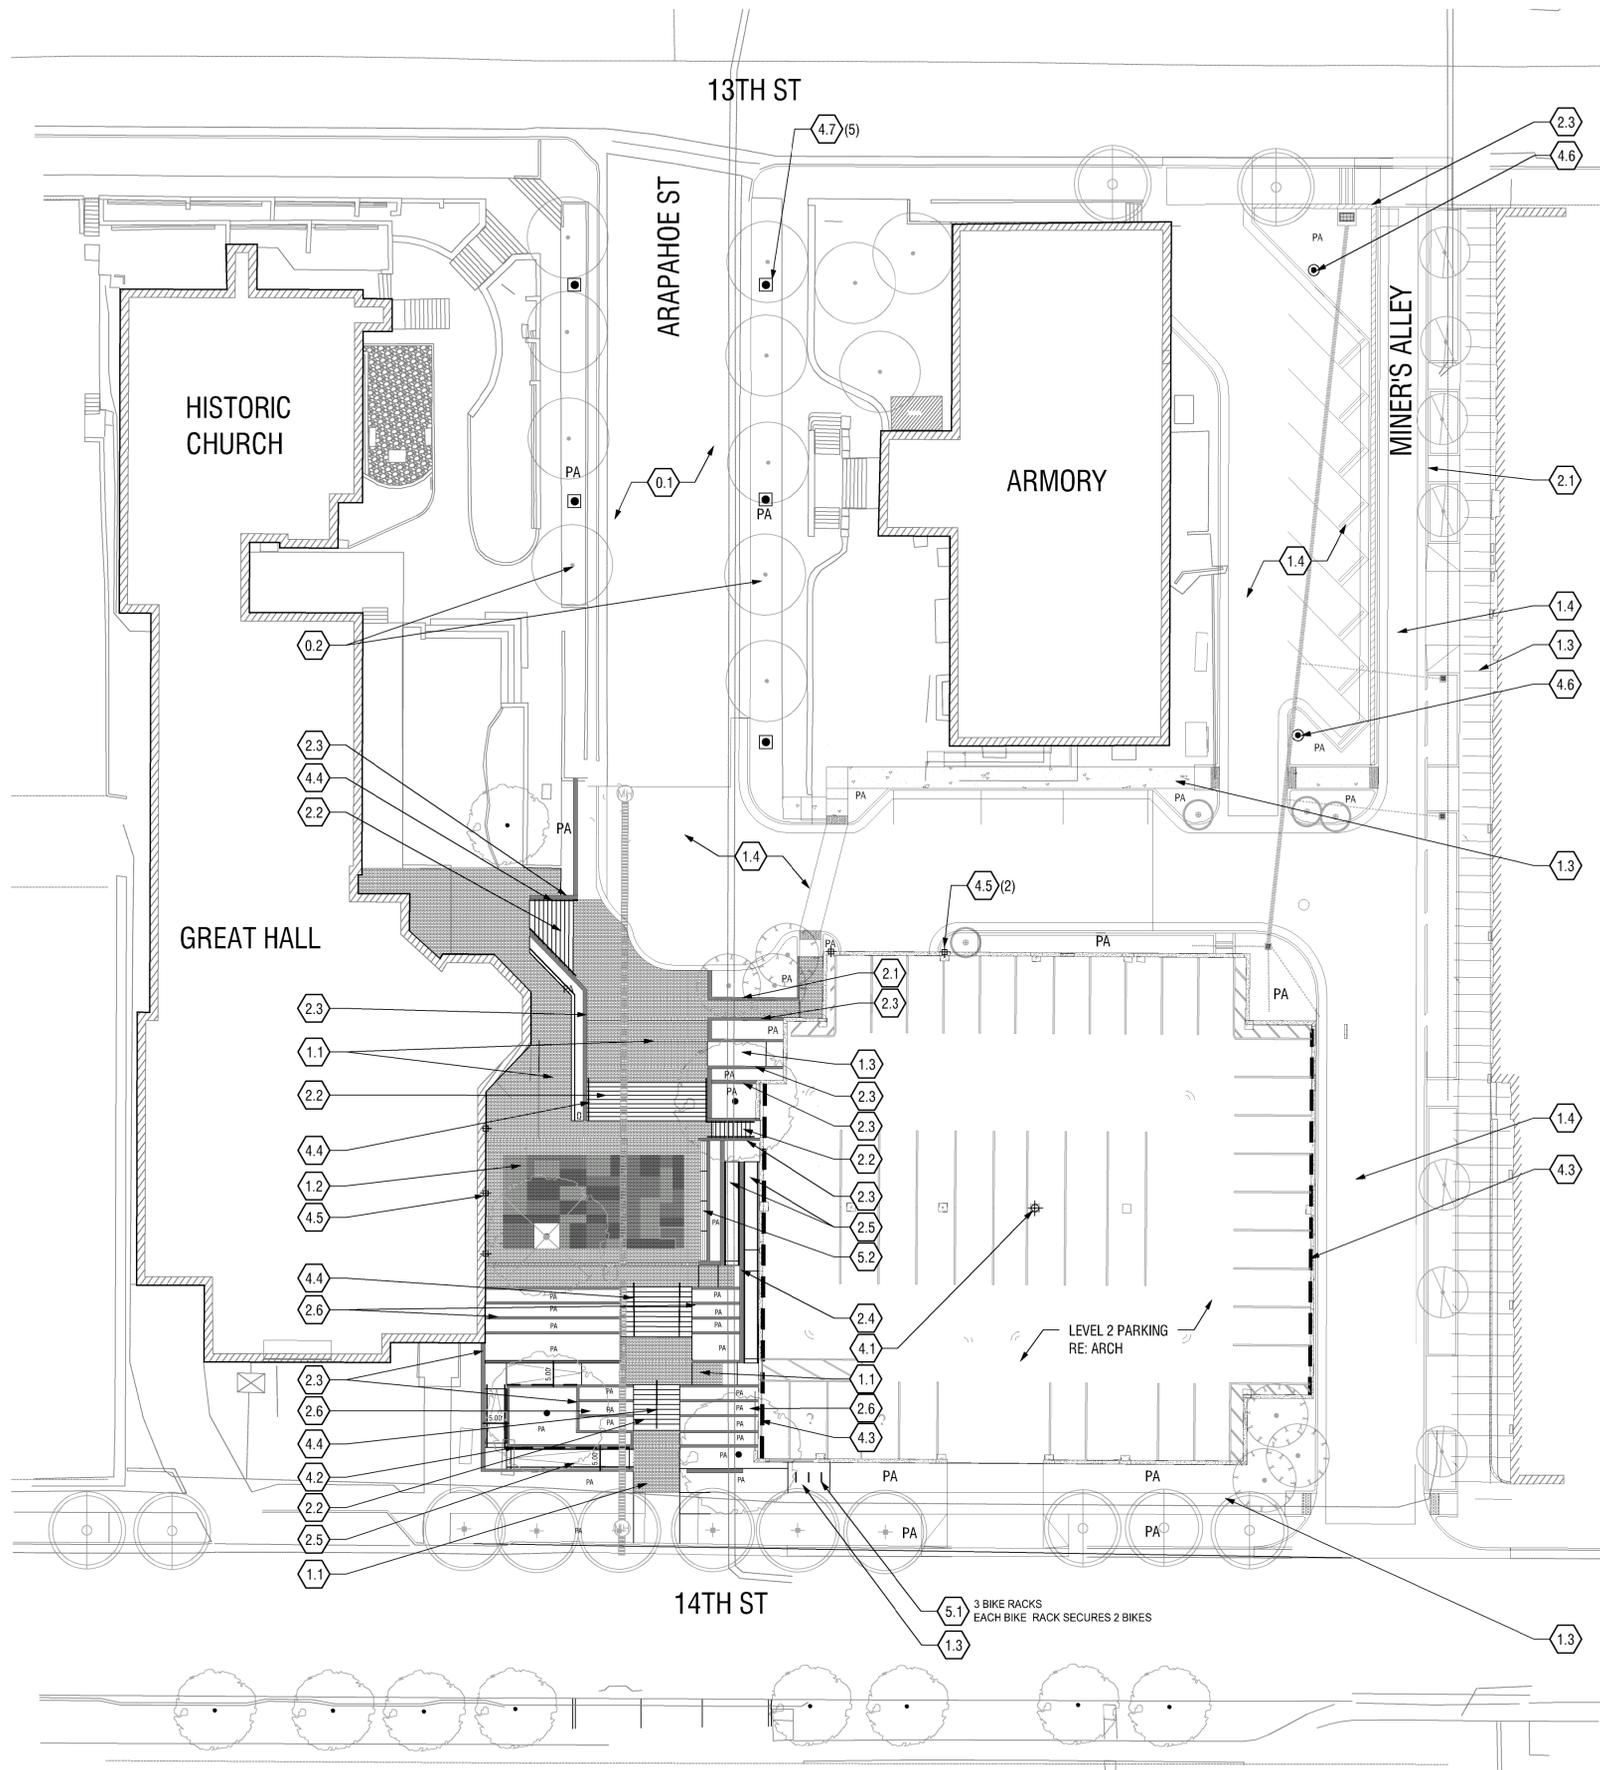


KEYNOTES

- 0.0 EXISTING CONDITIONS
 - 0.1 EXISTING ASPHALT PAVING
 - 0.2 EXISTING TREE(S)
- 1.0 PAVING
 - 1.1 4"x8" BRICK PAVERS. COLOR: DARK IRONSPOT, MANUFACTURER: PACIFIC CLAY
 - 1.2 4"x8" BRICK PAVERS. COLOR: BROWN FLASHED, PUEBLO, AND RED COMMON LAID OUT IN A GRAPHIC GEOMETRIC PATTERN. MANUFACTURER: PACIFIC CLAY.
 - 1.3 4" CONCRETE PAVING
 - 1.4 ASPHALT PAVING
- 2.0 CURBS, WALLS, STEPS
 - 2.1 C.I.P. CONCRETE CURB
 - 2.2 CONCRETE STAIRS
 - 2.3 C.I.P. CONCRETE WALL
 - 2.4 BRICK WALL WITH PRECAST CAP
 - 2.5 C.I.P. CONCRETE RAMP
 - 2.6 PLANTED STEPS
- 3.0 PLANTING
 - 3.1 DECIDUOUS TREE PLANTING
 - 3.2 SHRUB PLANTING
 - 3.3 SOD
 - 3.4 GRASS/PERENNIAL PLANTING
 - 3.5 WATER QUALITY PLANTING
- 4.0 LIGHTING
 - 4.1 LIGHT POLE WITH DIRECTIONAL LIGHTS TO LIGHT SURFACE BELOW
 - 4.2 WALL MOUNTED LINEAR LED
 - 4.3 LED STRIP MOUNTED IN GARAGE WALL
 - 4.4 UNDERLIT HANDRAIL
 - 4.5 DOWNLIGHTING ON ARCHITECTURE
 - 4.6 PARKING LOT LIGHT
 - 4.7 PEDESTRIAN LIGHT COLUMN
- 5.0 FURNISHINGS
 - 5.1 BIKE RACK
 - 5.2 WOOD BENCH


CALVARY EPISCOPAL CHURCH
CELEBRATION PLAZA / PARKING STRUCTURE
818 14th STREET
GOLDEN, CO 80401

ISSUE	DATE	DESCRIPTION
1	02.02.2018	SDP
2	03.26.2018	SDP RESUBMITTAL


DRAWN BY: AS CHECKED BY: CV
PROJECT NO.: 1715 CP INITIAL DATE: APRIL 2017

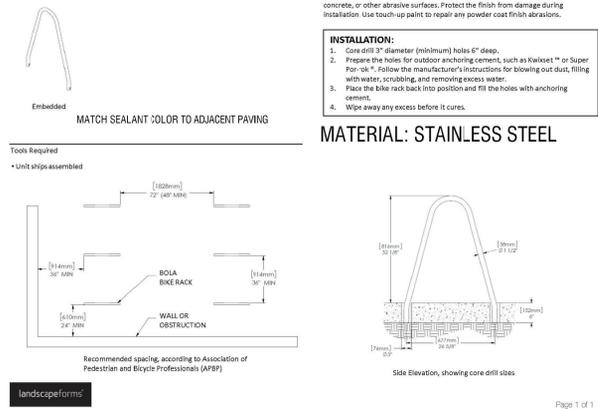


6 BIKE RACK 5.1 NTS

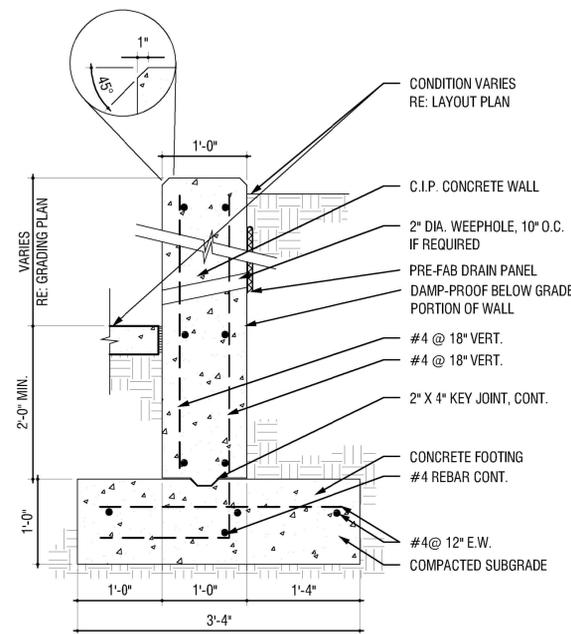


5 C.I.P. CONCRETE WALL 2.3 1" = 1'-0"

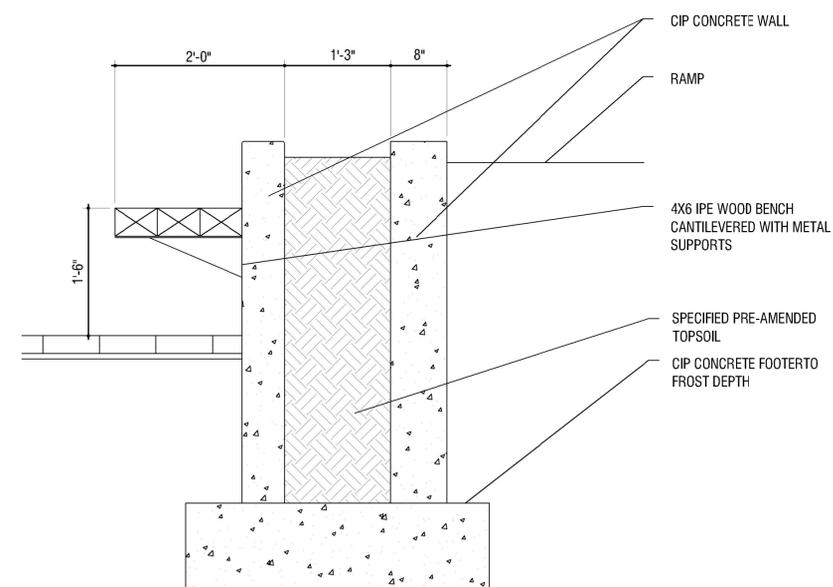


4 PRECAST CONCRETE BENCH 5.2 1" = 1'-0"

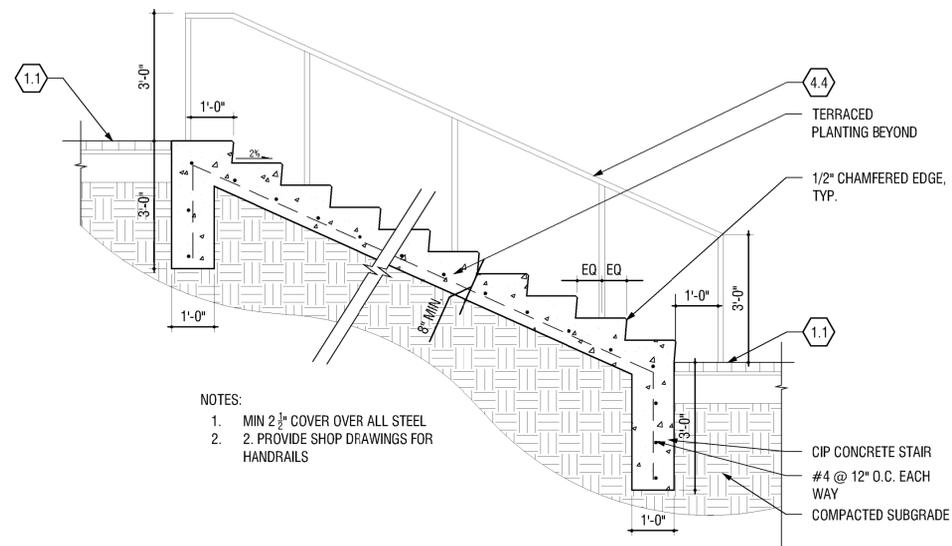

3 C.I.P. CONCRETE STEPS 2.2 1/2" = 1'-0"

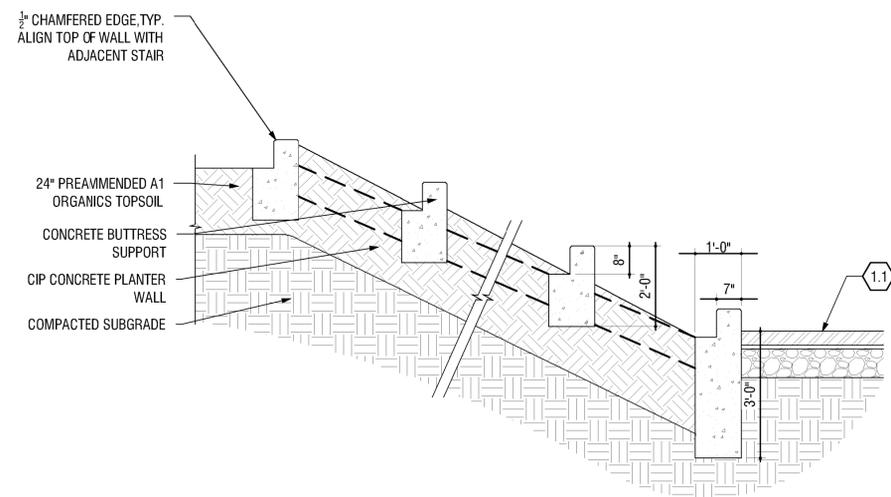

2 PLANTED STEPS 2.6 1/2" = 1'-0"

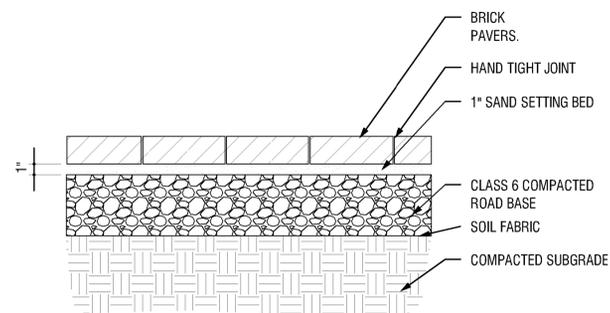

1 BRICK PAVER-SECTION 1.1, 1.2 1 1/2" = 1'-0"

KEYNOTES

- 0.0 EXISTING CONDITIONS
 - 0.1 EXISTING ASPHALT PAVING
 - 0.2 EXISTING TREE(S)
- 1.0 PAVING
 - 1.1 4"x8" BRICK PAVERS. COLOR: DARK IRONSPOT, MANUFACTURER: PACIFIC CLAY
 - 1.2 4"x8" BRICK PAVERS. COLOR: BROWN FLASHED, PUEBLO, AND RED COMMON LAID OUT IN A GRAPHIC GEOMETRIC PATTERN. MANUFACTURER: PACIFIC CLAY.
 - 1.3 4" CONCRETE PAVING
 - 1.4 ASPHALT PAVING
- 2.0 CURBS, WALLS, STEPS
 - 2.1 C.I.P. CONCRETE CURB
 - 2.2 CONCRETE STAIRS
 - 2.3 C.I.P. CONCRETE WALL
 - 2.4 BRICK WALL WITH PRECAST CAP
 - 2.5 C.I.P. CONCRETE RAMP
 - 2.6 PLANTED STEPS
- 3.0 PLANTING
 - 3.1 DECIDUOUS TREE PLANTING
 - 3.2 SHRUB PLANTING
 - 3.3 SOD
 - 3.4 GRASS/PERENNIAL PLANTING
 - 3.5 WATER QUALITY PLANTING
- 4.0 LIGHTING
 - 4.1 LIGHT POLE WITH DIRECTIONAL LIGHTS TO LIGHT SURFACE BELOW
 - 4.2 WALL MOUNTED LINEAR LED
 - 4.3 LED STRIP MOUNTED IN GARAGE WALL
 - 4.4 UNDERLIT HANDRAIL
 - 4.5 DOWNLIGHTING ON ARCHITECTURE
 - 4.6 PARKING LOT LIGHT
- 5.0 FURNISHINGS
 - 5.1 BIKE RACK
 - 5.2 WOOD BENCH




CALVARY EPISCOPAL CHURCH
 CELEBRATION PLAZA / PARKING STRUCTURE
 818 14th STREET
 GOLDEN, CO 80401

ISSUE	DATE	DESCRIPTION
1	02.02.2018	SDP
2	03.26.2018	SDP RESUBMITAL

DRAWN BY: AS CHECKED BY: CV
 PROJECT NO.: 1715 CP INITIAL DATE: APRIL 2017

SITE DETAILS
L2.1

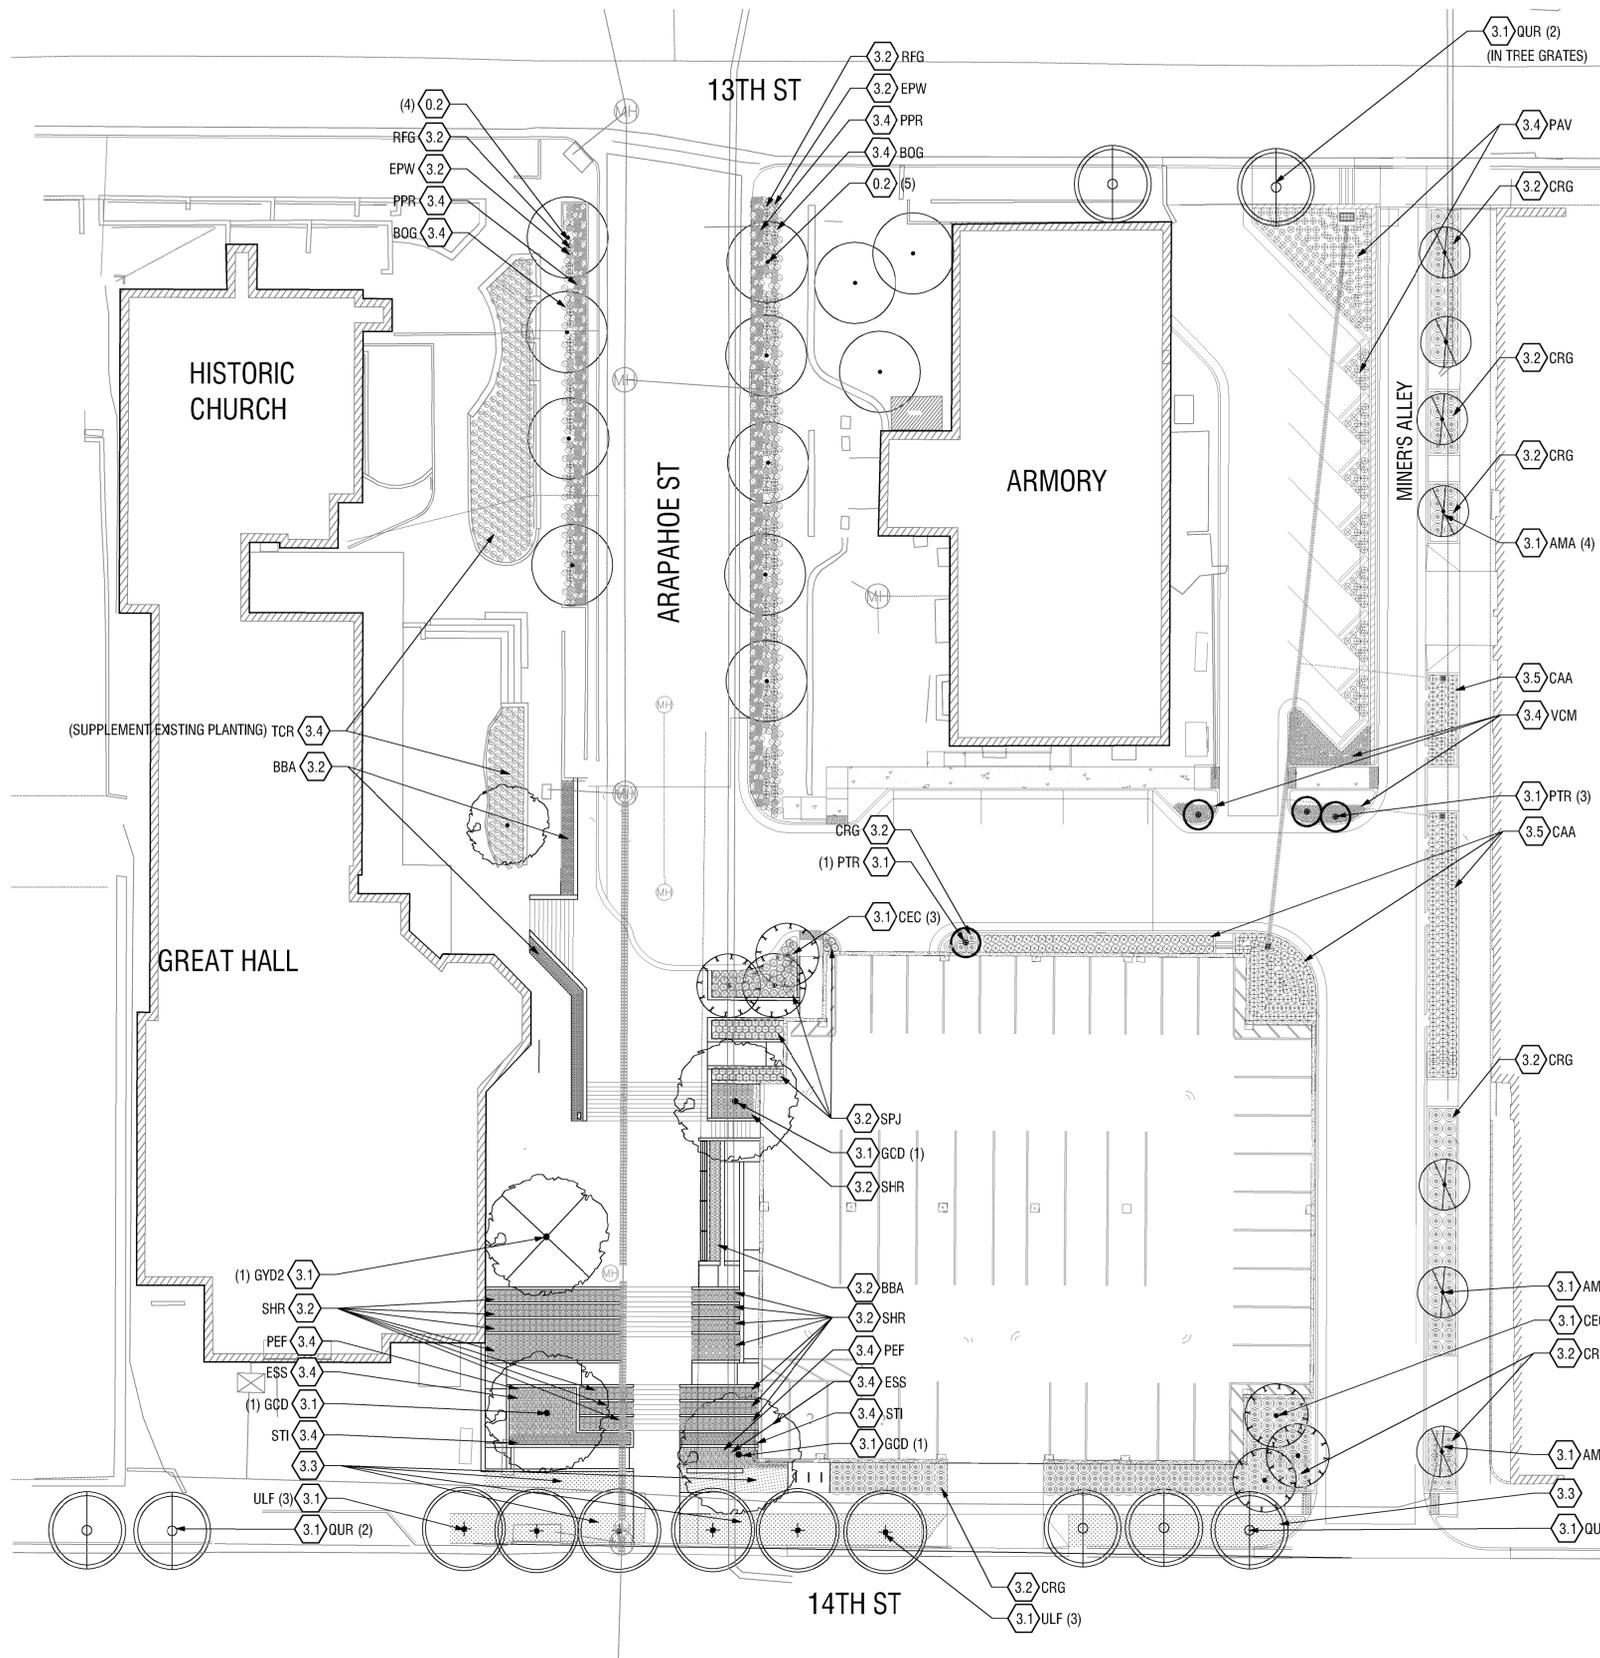

PLANTING SCHEDULE

DECIDUOUS TREES

SYMBOL	KEY	BOTANICAL NAME	COMMON NAME	SIZE
+	ULF	<i>Ulmus 'Frontier'</i>	Frontier Elm	3.5" cal
○	QUR	<i>Quercus robur</i>	English Oak	3.5" cal
⊕	PTR	<i>Populus tremuloides</i>	Quaking Aspen	2.5" cal
⊙	GVD	<i>Gymnocladus dioicus</i>	Kentucky Coffee Tree	3.5" cal
⊙	GVD2	<i>Gymnocladus dioicus</i>	Kentucky Coffee Tree	5" cal
⊙	CEC	<i>Cercis Canadensis</i>	Redbud	2.5" cal
⊙	AMA	<i>Amelanchier x 'Autumn Brilliance'</i>	Serviceberry	2.5" cal
⊙	EX	-	Existing Tree To Remain	-

SHRUBS

SYMBOL	KEY	SCIENTIFIC NAME	COMMON NAME
⊗	SHR	<i>Rosa 'Noare'</i>	Red Flower Carpet
⊙	CRG	<i>Cornus alba Red Gnome</i>	Arctic Fire Dogwood
⊕	SPJ	<i>Spiraea japonica</i>	Magic Carpet Spirea
⊙	VIB	<i>Syringa meyeri 'Palibiri'</i>	Dwarf Korean Lilac

PERENNIALS + ORNAMENTAL GRASSES

SYMBOL	KEY	SCIENTIFIC NAME	COMMON NAME
⊗	BBA	<i>Bouteloua gracilis 'Blonde Ambition'</i>	Blonde Ambition Blue Grama
⊗	STI	<i>Stipa (Nasella) tenuissima</i>	Mexican Feather Grass
⊕	PEF	<i>Penstemon eatonii</i>	Firecracker Penstemon
⊙	VCM	<i>Vinca minor</i>	Common Periwinkle
⊙	ESS	<i>Echinacea Sombbrero 'Salsa Red'</i>	Salsa Red Coneflower
⊙	BOG	<i>Bouteloua gracilis</i>	Blue Grama
⊙	PPR	<i>Papaver rhoeas</i>	Red Poppy
⊙	EPW	<i>Echinacea purpurea 'White Swan'</i>	White Coneflower
⊕	RFG	<i>Rudbeckia fulgida 'Goldsturm'</i>	Black Eyed Susan
⊙	GOR	<i>Galium ordoatum</i>	Sweet Woodruff
⊙	SCS	<i>Schizachyrium scoparium</i>	Little Blue Stem
⊙	TCR	<i>Tanacetum x coccineum 'Robinson's Red'</i>	Crimson Painted Daisy
⊙	CAA	<i>Calamagrostis acutiflora 'Karl Foerester'</i>	Karl Foerester Reed Grass
⊙	PAV	<i>Panicum virgatum</i>	Switchgrass

- KEYNOTES**
- 0.0 EXISTING CONDITIONS
 - 0.1 EXISTING ASPHALT PAVING
 - 0.2 EXISTING TREE(S)
 - 1.0 PAVING
 - 1.1 4"x8" BRICK PAVERS. COLOR: DARK IRONSPOT, MANUFACTURER: PACIFIC CLAY
 - 1.2 4"x8" BRICK PAVERS. COLOR: BROWN FLASHED, PUEBLO, AND RED COMMON LAID OUT IN A GRAPHIC GEOMETRIC PATTERN. MANUFACTURER: PACIFIC CLAY.
 - 1.3 4" CONCRETE PAVING
 - 1.4 ASPHALT PAVING
 - 2.0 CURBS, WALLS, STEPS
 - 2.1 C.I.P. CONCRETE CURB
 - 2.2 CONCRETE STAIRS
 - 2.3 C.I.P. CONCRETE WALL
 - 2.4 BRICK WALL WITH PRECAST CAP
 - 2.5 C.I.P. CONCRETE RAMP
 - 2.6 PLANTED STEPS
 - 3.0 PLANTING
 - 3.1 DECIDUOUS TREE PLANTING
 - 3.2 SHRUB PLANTING
 - 3.3 SOD
 - 3.4 GRASS/PERENNIAL PLANTING
 - 3.5 WATER QUALITY PLANTING
 - 4.0 LIGHTING
 - 4.1 LIGHT POLE WITH DIRECTIONAL LIGHTS TO LIGHT SURFACE BELOW
 - 4.2 WALL MOUNTED LINEAR LED
 - 4.3 LED STRIP MOUNTED IN GARAGE WALL
 - 4.4 UNDERLIT HANDRAIL
 - 4.5 DOWNLIGHTING ON ARCHITECTURE
 - 4.6 PARKING LOT LIGHT
 - 4.7 PEDESTRIAN LIGHT COLUMN
 - 5.0 FURNISHINGS
 - 5.1 BIKE RACK
 - 5.2 WOOD BENCH

NOTES:
 -IRRIGATION WITH RAIN SENSORS WILL BE PROVIDED IN ALL PLANTING AREAS
 -LIMB TREES UP NEAR AT INTERSECTIONS OF PUBLIC STREETS AND GARAGE ENTRANCES SO THERE'S NO FOLIAGE BELOW 8'

SCALE: 1" = 20'-0"

CITY OF GOLDEN STREET TREE REQUIREMENT (1 PER 35')

STREET	LENGTH	# TREES REQUIRED	# TREES PROPOSED
14TH ST	204'	6	9
MINER'S ALLEY	315'	9	10
ARAPAHOE CONNECTOR STREET	160'	5	7
13TH ST	50'	2	2

NUMBER OF TREES REQUIRED: 22
 NUMBER OF TREES REQUIRED FOR SUSTAINABILITY POINT (REQUIRED + 20%): 27
 TOTAL NUMBER OF TREE PROPOSED ON SITE: 34




CALVARY EPISCOPAL CHURCH
 CELEBRATION PLAZA / PARKING STRUCTURE
 818 14th STREET
 GOLDEN, CO 80401

ISSUE	DATE	DESCRIPTION
1	02.02.2018	SDP
2	03.26.2018	SDP RESUBMITTAL


DRAWN BY: AS CHECKED BY: CV
 PROJECT NO.: 1715 CP INITIAL DATE: APRIL 2017

PLANTING PLAN
L3.0

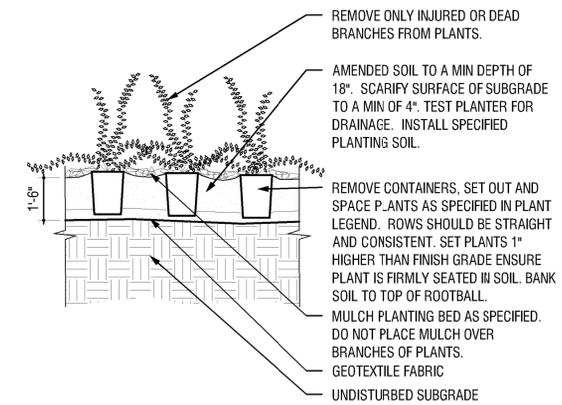

2 SHRUBS / PERENNIAL / GRASS PLANTING


3/4" = 1'-0"

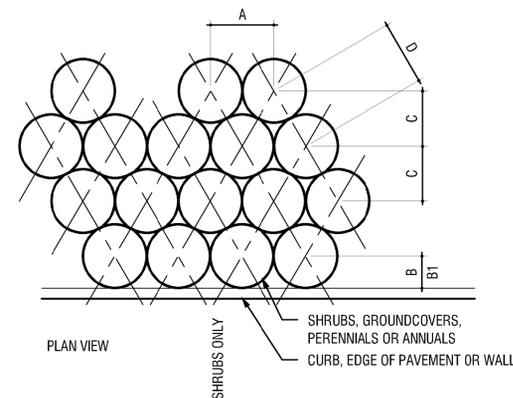

PLANT SPACING	A	B	B1	C	D
6"	6"	6"	6"	5"	6"
8"	8"	6"	8"	7"	8"
12"	12"	6"	12"	10"	12"
18"	18"	8"	18"	15"	18"
24"	24"	18"	24"	20"	24"
30"	30"	18"	30"	26"	30"
36"	36"	24"	36"	31"	36"
48"	48"	24"	48"	41"	48"

3 PLANT SPACING

3/4" = 1'-0"

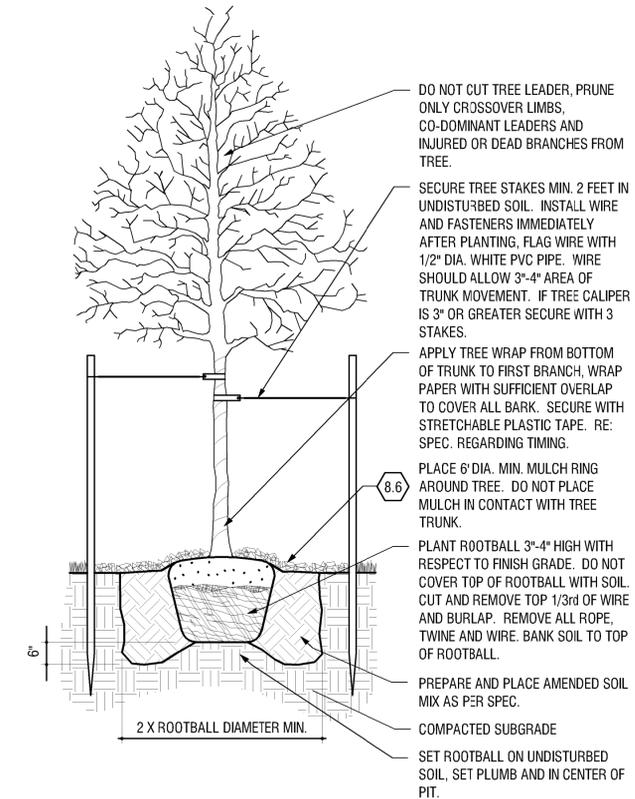

1 DECIDUOUS TREE PLANTING


1/2" = 1'-0"

CALVARY EPISCOPAL CHURCH
CELEBRATION PLAZA / PARKING STRUCTURE
818 14th STREET
GOLDEN, CO 80401

ISSUE	DATE	DESCRIPTION
1	02.02.2018	SDP
2	03.26.2018	SDP RESUBMITTAL

DRAWN BY: AS CHECKED BY: CV
PROJECT NO.: 1715 CP INITIAL DATE: APRIL 2017

Calculation Summary					
Label	Avg	Max	Min	Avg/Min	Max/Min
Site	1.10	14.6	0.0	N.A.	N.A.
Armory Parking Lot	1.57	4.0	0.1	15.70	40.00

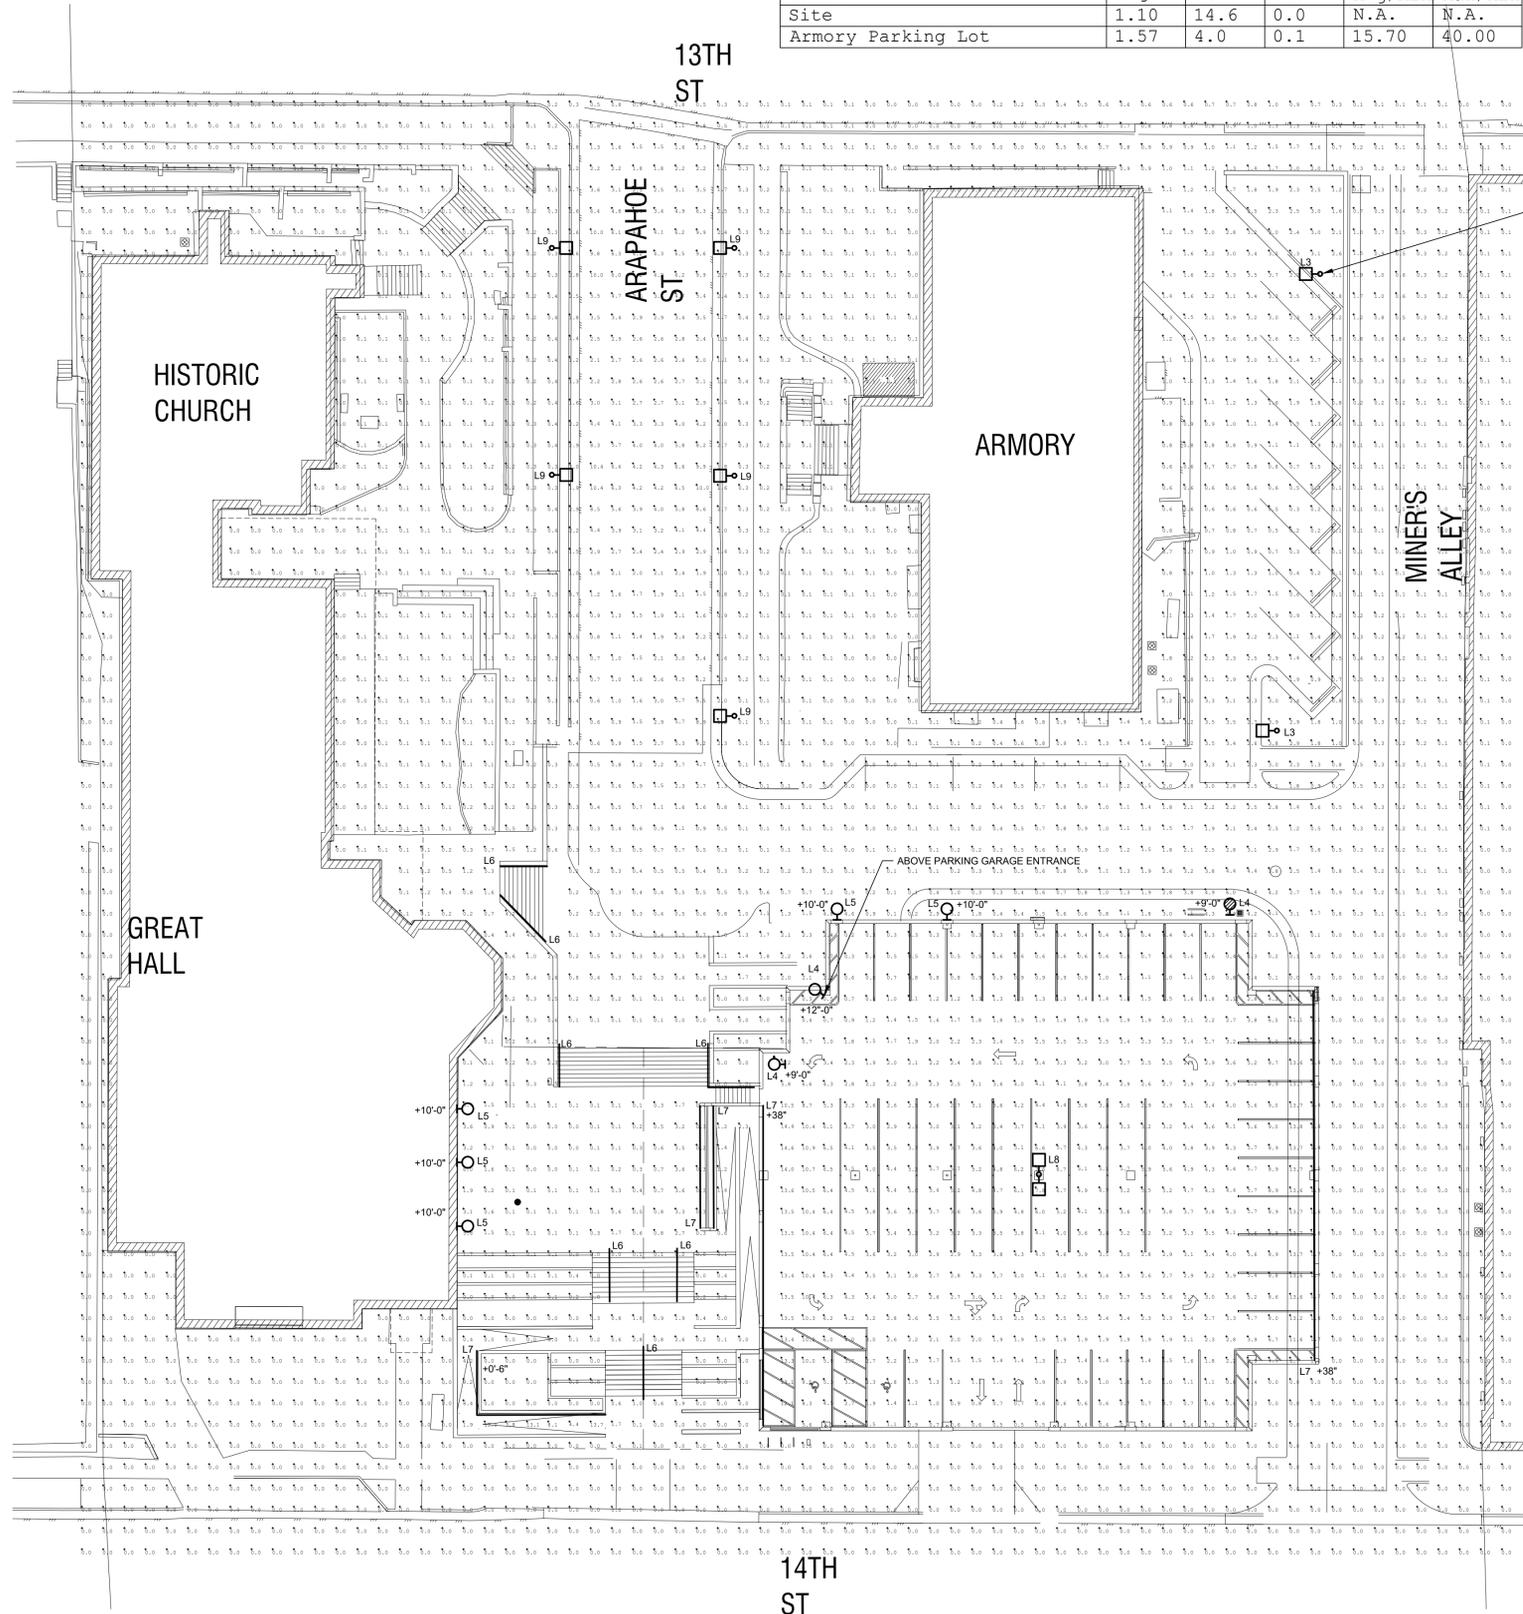

aw

architectural
WORKSHOP

280 SOUTH PENNSYLVANIA
DENVER, COLORADO 80209
PH: 303.788.1717 FAX: 303.788.1964



CALVARY EPISCOPAL CHURCH
CELEBRATION PLAZA / PARKING STRUCTURE
818 14th STREET
GOLDEN, CO 80401

ISSUE	DATE	DESCRIPTION
1	02.02.2018	SDP
2	03.26.2018	SDP RESUBMITTAL

DRAWN BY: MTR CHECKED BY: MAS
PROJECT NO.: 9869.00 INITIAL DATE: APRIL 2017

SITE PHOTOMETRIC
PLAN

SP1.0

1 SITE PHOTOMETRIC PLAN
SCALE: 1" = 20'-0"



McGraw-Edison

DESCRIPTION
The Galleon™ LED luminaire delivers exceptional performance in a highly scalable, low-profile design. Patented, high-efficiency AccuLED Optics™ system provides uniform and energy conscious illumination to walkways, parking lots, roadways, building areas and security lighting applications. IP66 rated and ULcUL. Listed for wet locations.

Catalog #	Type	
Project	L3 and L5 on 18" 2" Pole	
Comments	Date	
Prepared by		

SPECIFICATION FEATURES

Construction
Extruded aluminum driver enclosure thermally isolated from Light Squares for optimal thermal performance. Heavy-wall, die-cast aluminum end caps enclose housing and die-cast aluminum heat sinks. A unique, patent pending interlocking housing and heat sink provides scalability with superior structural rigidity. 3G vibration tested and rated. Optional tool-less hardware available for ease of entry into electrical chamber. Housing is IP66 rated.

Optics
Patented, high-efficiency injection-molded AccuLED Optics technology. Optics are precisely designed to shape the distribution maximizing efficiency and application spacing. AccuLED Optics creates consistent distributions with the scalability to meet customized application requirements. Offered standard in 4000K (+/- 275K CCT 70 CRI, Optional 3000K, 5000K and 6000K CCT.

Electrical
LED drivers are mounted to removable tray assembly for ease of maintenance. 120-277V 50/60Hz, 347V 60Hz or 480V 60Hz operation. 480V is compatible for use with 480V Wye systems only. Standard with 0-10V dimming. Shipped standard with Eaton proprietary circuit module designed to withstand 10kV of transient line surge. The Galleon LED luminaire is suitable for operation in -40°C to 40°C ambient environments. For applications with ambient temperatures exceeding 40°C, specify the EA (High Ambient) option. Light Squares are IP66 rated. Greater than 90% lumen maintenance expected at 60,000 hours. Available in standard 1A drive current and optional 600mA, 800mA and 1200mA drive currents (nominal).

Mounting
STANDARD ARM MOUNT: Extruded aluminum arm includes internal bolt guides allowing for easy positioning of fixture during mounting. When mounting two or more luminaires at 90° and 120° apart, the EA extended arm may be required. Refer to the arm mounting requirement table. Round pole adapter included. For wall mounting, specify wall mount bracket option. QUICK MOUNT ARM: Adapter is bolted directly to the pole. Quick mount arm slide into place on the adapter and is secured via two screws, facilitating quick and easy installation. The versatile, patent pending, quick mount arm accommodates multiple drill patterns ranging from 1-1/2" to 4-7/8". Removal of the door on the quick mount arm enables wiring of the fixture without having to access the driver compartment. A knock-out enables round pole mounting.

Finish
Housing finished in super durable TGIC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear. Heat sink is powder coated black. Standard housing colors include black, bronze, grey, white, dark platinum and graphite metallic. RAL and custom color matches available.

Warranty
Five-year warranty.




GLEONE GALLEON LED

1-10 Light Squares
Solid State LED


AREA/SITE LUMINAIRE

DIMENSIONS

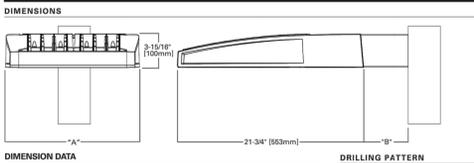

Number of Light Squares	"A" Width	"B" Standard Arm Length	"B" Optional Arm Length	Weight with Arm (lbs.)	EPA with Arm (lm/ft²)
1-4	15-1/2" (394mm)	7" (178mm)	10" (254mm)	33 (15.0 kgs.)	0.96
5-6	21-5/8" (549mm)	7" (178mm)	10" (254mm)	44 (20.0 kgs.)	1.00
7-8	27-5/8" (702mm)	7" (178mm)	13" (330mm)	64 (28.5 kgs.)	1.07
9-10	33-3/4" (857mm)	7" (178mm)	16" (406mm)	83 (28.0 kgs.)	1.12

DRILLING PATTERN



NOTE: 1. Optional arm length to be used when mounting two fixtures at 90° on a single pole. 2. EPA calculated with optional arm length.

EATON
Powering Business Worldwide

DLC
ULCUL Wet Location Listed
ISO 9001
LM79 / LM80 Compliant
IP66 Vibration Rated
IP66 Rated
DesignLights Consortium™ Qualified*

ENERGY DATA
Electronic LED Driver
+0.9 Power Factor
<20% Total Harmonic Distortion
120-277V 50/60Hz
347V & 480V 60Hz
40°C Max. Temperature
40°C Max. Temperature
50°C Max. Temperature (HA Option)

ESD
TD80002EN
2016-09-28 15:31:55

McGraw-Edison

DESCRIPTION
The Impact Elite family of wall luminaires is the ideal complement to site design. Incorporating modular LightSquares technology, the Impact Elite luminaire provides outstanding uniformity and energy-conscious illumination. Combined with a rugged construction, the Impact Elite luminaire is the ideal facade and security luminaire for zones surrounding schools, office complexes, apartments and recreational facilities. ULcUL listed for wet locations.

Catalog #	Type	
Project	L4	
Comments	Date	
Prepared by		

SPECIFICATION FEATURES

Construction
Heavy-wall, die-cast aluminum housing and removable hinged door frame for precise tolerance control and repeatability. Hinged door inset for clean mating with housing surface and secured via two captive fasteners. Optional tamper-resistant Torx™ head fasteners offer vandal resistant access to the electrical chamber.

Optics
Choice of 10 patented, high-efficiency AccuLED Optics™ distributions. Optics are precisely designed to shape the light output, maximizing efficiency and application spacing. AccuLED Optics technology creates consistent distributions with the scalability to meet customized application requirements. Offered Standard in 4000K (+/- 275K CCT and minimum 70 CRI. Optional 3000K, 5000K and 5700K CCT.

Electrical
LED drivers mount to die-cast aluminum back housing for optimal heat sinking, operation efficacy, and prolonged life. Standard drivers feature electronic universal voltage 120-277V 50/60Hz, 347V 60Hz or 480V 60Hz operation, greater than 0.9 power factor, less than 20% harmonic distortion, and are suitable for operation in -40°C to 40°C ambient environments. All fixtures are shipped standard with 10kV/10kA common – and differential – mode surge protection. LightSquares feature an IP66 enclosure rating and maintain greater than 90% lumen maintenance at 60,000 hours per IESNA TM-21. Emergency egress options for -20°C ambient environments and occupancy sensor available.

Mounting
Gasketed and zinc plated rigid steel mounting attachment fits directly to 4" T-box or wall with the Impact Elite "Hook-N-Lock" mechanism for quick installation. Secured with two captive corrosion resistant black oxide coated allen head set screws concealed but accessible from bottom of fixture.

Finish
Cast components finished in a five-stage super TGIC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear. Standard colors include black, bronze, grey, white, dark platinum and graphite metallic. RAL and custom color matches available. Consult the McGraw-Edison Architectural Colors brochure for the complete selection.

Warranty
Five-year warranty.




ISC/ISS/ST/ISW IMPACT ELITE LED

1 LightSquare
Solid State LED

WALL MOUNT LUMINAIRE

DIMENSIONS

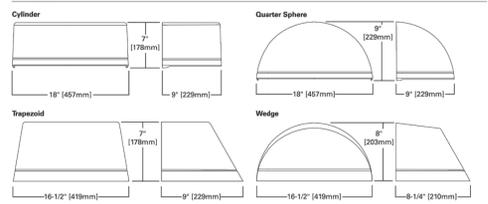

CERTIFICATION DATA
ULCUL Wet Location Listed
ISO 9001
LM79 / LM80 Compliant
IP66 Vibration Rated
IP66 Rated
DesignLights Consortium™ Qualified*

ENERGY DATA
Electronic LED Driver
+0.9 Power Factor
<20% Total Harmonic Distortion
120-277V 50/60Hz
347V & 480V 60Hz
40°C Max. Temperature
40°C Max. Temperature
50°C Max. Temperature (HA Option)

ESD
TD81403EN
January 18, 2016 3:54 PM

FC LIGHTING

DESCRIPTION
4" Square Wall, Pendant or Surface Mounted Die-Cast Aluminum Cylinder with Up and Down Light.

Approved:
Fixture Type L5

ORDERING

EXAMPLE: FCCS0410W2-120V-3K-750-BK-UNFL-DNFL

SERIES	VOLTAGE	SOURCE	TEMPERATURE	LAMP	FINISH	LED OPTICS	ACCESSORIES
FCCS0410W	120V	LED	3K	600 Lumens (8.5W) @ direction	BK Black	UP	LD LED Dimming (0-10V)
	277V	35K	900 Lumens (14W) @ direction	BZ Bronze	USP Spot	DSP Spot	APLX Additional Pendant Length
	347V△	4K	1800 Lumens (43W) (1 direction only)	SL Silver	UNFL Narrow Flood	DNFL Narrow Flood	BBU Battery Backup, Remote
				NH White	UFL Flood	DFL Flood	
				CC Custom Color	UNFL Wide Flood	DNFL Wide Flood	
				UNO None	DNO None		

SPECIFICATION

MOUNTING

- Mounts directly to standard recessed junction box. Additional mounting holes allow unit to be attached directly to mounting surface.

CONSTRUCTION

- Marine grade, corrosion resistant, heavy walled, high pressure die-cast aluminum with die-cast back mounting plate.
- Lens is 1/4" thick clear, tempered glass. Precision formed semi-specular aluminum for maximum reflectance.
- Continuous silicone gasket to seal out contaminants. Hidden fasteners allow for cover removal to facilitate installation and service.

LED

- Lumens stated are the minimum delivered out of the luminaire. LED lifetime is 70,000+ hours with the lumen depreciation greater than L70. All of our luminaires are LM-80 tested, are ≥ CRI 80 and have a 4-step MacAdam Ellipse color consistency. Integral power supply standard. Input voltage 120V or 277V standard. Consult factory for other voltages and any single color options.

FINISH

- Six stage chemical pre-treatment process that includes iron phosphate, to prepare the substrate for a UV stable, super durable standard polyester powder coat.

ELECTRICAL

- Ballast UL listed ballast standard. Ballast has a manufacturer issued 5 year warranty. Please consult factory for other voltage options.

LISTING

- UL & cUL/ETL, U.S. and CA listed for wet location in down position. IP65 Rating.

FC Lighting, Inc. reserves the right to change lab test details or specifications without notice. Product use certifies agreement to FC Lighting's terms and conditions.

© 2016 FC Lighting, Inc. 3639 Swenson Ave., St. Charles, IL 60174 p. 800-890-1729 f. 630-889-8106 www.fc-lighting.com AK Rev. 816

aw

architectural
WORKSHOP

280 SOUTH PENNSYLVANIA
DENVER, COLORADO 80209
PH: 303.788.1717 FAX: 303.788.1964

BGC BUILDINGWORKS
systems fulfilled

303.276.3820 www.bgbuildingworks.com
Project No. 9869.00 Copyright 2016
ALBUQUERQUE AVON DENVER FORT COLLINS

luxrail™ INTERIOR/EXTERIOR APPLICATIONS

Fixture Type L6

Application
ANSI and ADA compliant, luxrail is an indoor/outdoor LED-based handrail that delivers functional illumination. Two intensities may be specified: standard output and high output. The standard light output version delivers illuminance levels appropriate for exterior applications (2 footcandles at grade) as well as for dark interior environments with low ambient illumination levels (e.g., themed environments, theatres and residential areas). The high output version delivers illuminance levels applicable to interior environments – providing in excess of 10 footcandles along the path of egress (ANSI required for stair treads). Independent photometric test reports and IES Format data are available at www.cooperlighting.com.

luxrail's standard handrail gripping surfaces are circular in cross section and meet 2004 ADAAG (Americans with Disability Act Accessibility Guidelines). Patented optical assemblies deliver 10', 25' and 55' beam spreads, as well as an asymmetric option. The 25' and 55' beam patterns are most suitable for illuminating pathways, while the 10' beam spread offers accent lighting for optional glass or stainless steel cable railing infills. Projected average rated life is 50,000 hours at 70% of lamp lumen output. Contact factory for IES LM-80 compliance. To ensure proper performance, architectural details should allow for ventilation and air flow around the fixture. Ambient temperature surrounding the fixture shall not exceed 122°F (50°C).

Light Output
Two luminous intensities are available for white light. All values below represent the initial raw lumens of the LED. IES format photometry of Lighting Facts labels represent actual light output measured in lumens and candle power. Light output losses include optical, thermal and power supply inefficiencies. IES LM-79 format files may be obtained from the factory or downloaded from www.cooperlighting.com. Results are typical measurements. For 90+ CRI, please consult factory for pricing and lead-time.

Initial Lumens	Standard Output	High Output
2700K White:	72 lms/ft	253 lms/ft
3000K White:	81 lms/ft	284 lms/ft
3500K White:	83 lms/ft	289 lms/ft
4000K White:	88 lms/ft	307 lms/ft

Non-standard color temperatures available as a custom offering for a modest additional cost and lead-time.

Construction
luxrail may be post mounted or wall mounted. It recommends installation be completed by a qualified handrail installer. Mounting hardware (post or wall) is typically required up to 5' O.C., depending on the handrail alloy. Final post and wall bracket spacing must be determined by a licensed architect or structural engineer. luxrail is available in stainless steel and aluminum. Vandal resistant access chamber allows units to be removed for maintenance purposes. The LED light fixture inside the caprail is UL Listed for wet locations. Contact factory for maintenance guidelines.

All handrail component parts are engineered for quick installation. Field welding or cutting is typically not required. All parts are prefabricated to field dimensions and are assembled in the field with mechanical connection or epoxy. Contact to Lighting for recommended handrail installers.

Electrical
luxrail houses a low voltage LED-based light fixture that is integrated into the underside of the handrail. 24 volt 100 watt power supplies are provided as a standard. For detailed information regarding delay chain limiters, remote distance limitations, power supply options, and dimming options consult Eaton's Cooper Lighting website (www.cooperlighting.com) or an io representative.

Driver Remote Distance
7'-0" (21.0m) w/12 AWG
18'-0" (5.5m) w/16 AWG
48'-0" (14.0m) w/14 AWG
71'-0" (21.6m) w/12 AWG

Dimming modules must be specified separately. For detailed information download the power supply specification sheet from www.cooperlighting.com.

Power Consumption
Power consumption does not include power supply losses.

Standard Output	High Output
1.02 w/ft	3.81 w/ft

Lighting facts™
Light Output (Lumens) 512
Watts 12.4
Lumens per Watt (Efficacy) 41
Color Accuracy (Color Rendering Index (CRI)) 83
Light Color (Correlated Color Temp. (CCT)) 2992 (Warm White)
Warm White 3000K Bright White 4000K Daylight 5000K
Warranty** Yes

Label references 36" luxrail fixture with a 55' beam spread in High Output 3000K. Lighting Facts for additional beam spreads and light output levels may be obtained from Lighting Facts.

in Lighting 1100 Busch Pkwy Buffalo Grove, IL 60089 f 847.777.3900 f 847.777.3901 i info@eaton.com w cooperlighting.com V. 10_05_15


FlexSR590 Series

Fixture Type L7

PRODUCT DESCRIPTION
FlexSR590 Series is flexible LED Liner ribbon, with 90+ CRI, that allows for LED lighting in a number of applications. Architectural coves, wall slot, under cabinets, stair treads, and handrails are all viable applications for this product.

At 4.5W/ft, Flex590 Series is one of the brightest and smallest products available. Product is rated 24VDC and is available in 2700K, 3000K, 4000K, 5000K, Red, Blue, Green, Amber, and RGB. Interior (Damp), Wet Location (Wet).

PRODUCT DIMENSIONS

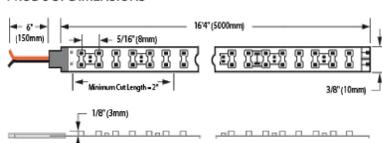

SPECIFICATIONS

Category	Specifications
ELECTRICAL	24VDC, 4.5W/ft, 22ft max per 100watt secondary output (16.4' per reel), 3.0A per reel.
LUMENS	405 Lumens/ft
DIMENSIONS	Interior Series: 1/8" W x 1/16" H Weather Proof: 1/2" W x 1/8" H
COLOR TEMPERATURE	White: 2700K - 5000K Colors: Red, Blue, Green, Amber, RGB and RGBW
DIMMING	Available with ParadigmLED dimming power supplies (magnetic low-voltage 90+ CRI dimming).
MOUNTING	3M double stick mounting tape pre-affixed. Optional Silicone, Optional Mounting Channel, Optional Lens.
CONNECTORS	Field-installed flexible mounting connectors.
POWER SUPPLY	Lutron Power Supplies Recommended: Other dimmable power supplies available, see spec sheets. All power supplies are UL Rated.
LABEL	UL listed


ORDERING GUIDE

FIXTURE	COLOR	LOCATION	VOLTAGE	ACCESSORIES*
PL-FLEXSR590	30 Warm White (3000K)	INT Interior	24 24 Volts	PL-LWC-Custom-XX - Custom Lead Wire XX = Length
FlexSR590 LED	27 Warm White (2700K)	WP Exterior		AMC - Mounting Channel-Variou sizes, see Channel Catalog for complete list
	41 Bright White (4100K)			PL-PS-L3D0-90W-24V-U1 - Hi-Lume Premier 0.1%, EcoSystem Digital/3 wire phase control
	RGBW RGBW			PL-PS-L3DA-40W-24V-U1 - Hi-Lume 1%, EcoSystem Digital/3-wire phase control
	RR Red			PL-PS-L2FA-40W-24V-U1 - Hi-Lume 1%, 2-wire forward phase control 120V
	GG Green			
	BB Blue			
	AA Amber			
	RGB RGB			

Paradigm LED, 6753 E. 47th Ave Dr, Suite H, Denver CO 80216 Tel 303.399.0386 Fax 303.362.9570 www.ParadigmLED.com
In an effort to continually improve our products, we reserve the right to change or modify designs and/or materials without prior notice. All rights reserved. These products may be covered by one or more U.S. or international patents or patents pending. 06/21/16

Specification Sheet

Fixture Type L9 - 14'-0" Tall
esplanade
ESP100

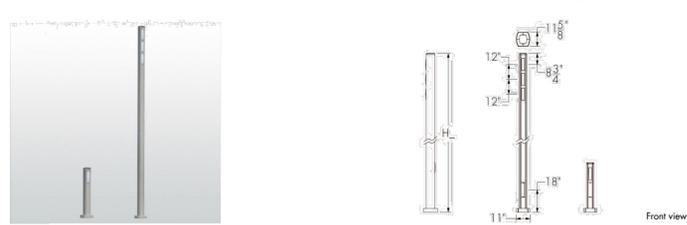

Description
Esplanade 100 is a flexible, high-performance, variable height LED bollard or column. Featuring a sleek design, Lumenpulse Esplanade is designed to provide unmatched versatility. The luminaire offers a choice of single (3400 up to 13,600 lm) or double-sided modules (6800 up to 27,200 lm), color temperatures, lenses, domes, and finishes.

Features

Feature	Specifications
Height	Specify height within 36 in - 192 in range, 6 in increment
Output (module lumens)	Single sided column, 3400lm (13W, 1 LED module), Single sided column, 6800lm (66W, 2 LED module), Single sided column, 10200lm (99W, 3 LED module), Single sided column, 13600lm (132W, 4 LED modules), Double sided column, 6800lm total (66W, 2 LED modules), Double sided column, 13600lm total (132W, 4 LED modules), Double sided column, 20400lm total (198W, 6 LED modules), Double sided column, 27200lm total (264W, 8 LED modules)
Color and Color Temperature	3000K, 4000K, 5000K
Distributions	Type III
Options	1 LED module pedestrian light, specify height in inches, Surge protector
Warranty	5-year limited warranty
Performance	
Color Rendering	70+
Lumen Maintenance	L70 @ 70,000 hrs (25 °C)
BUG rating	80 U4 G3 (3400lm, 4000K)

CALVARY EPISCOPAL CHURCH
CELEBRATION PLAZA / PARKING STRUCTURE
818 14th STREET
GOLDEN, CO 80401

ISSUE	DATE	DESCRIPTION
1	02.02.2018	SDP
2	03.26.2018	SDP RESUBMITTAL

DRAWN BY: MTR CHECKED BY: MAS
PROJECT NO.: 9869.00 INITIAL DATE: APRIL 2017

SITE PHOTOMETRIC
FIXTURE CUT SHEETS

SP1.1

lumenpulse™
1220 Marie Victoria Blvd., Longwell, GA 31629
www.lumenpulse.com





Lumenpulse Group Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2018 02 23 copyright © 2018 Lumenpulse Group, Inc. 1 / 5

THIS DOCUMENT IS AN INSTRUMENT OF SERVICES, AND AS SUCH REMAINS THE PROPERTY OF THE ARCHITECT. PERMISSION FOR USE OF THIS DOCUMENT IS LIMITED AND CAN BE EXTENDED ONLY BY AGREEMENT WITH ARCHITECTURAL WORKSHOP, L.L.C. THE ARCHITECT DISCLAIMS ANY RESPONSIBILITY ARISING FROM ANY UNAUTHORIZED USE OF THESE DRAWINGS AND NOTES. ANY AUTHORIZATION MUST BE WRITING.

COPYRIGHT NOTE



280 SOUTH PENNSYLVANIA
 DENVER, COLORADO 80209
 PH: 303.788.1717 FAX: 303.788.1964

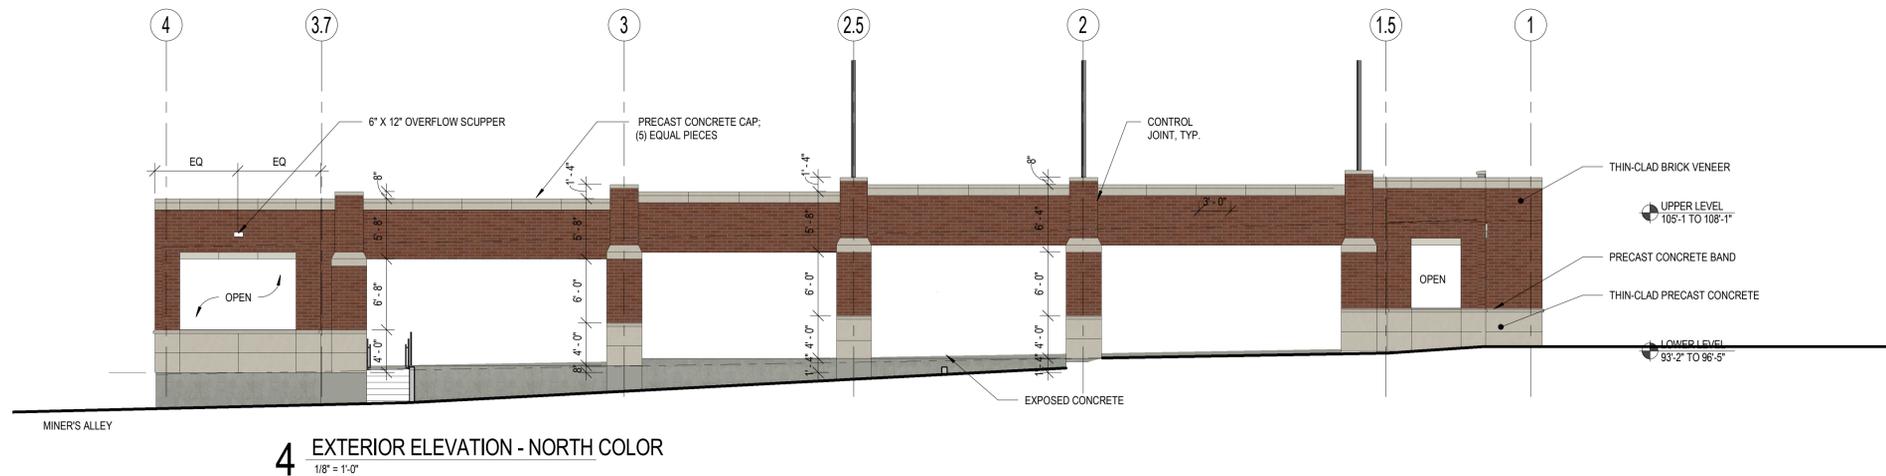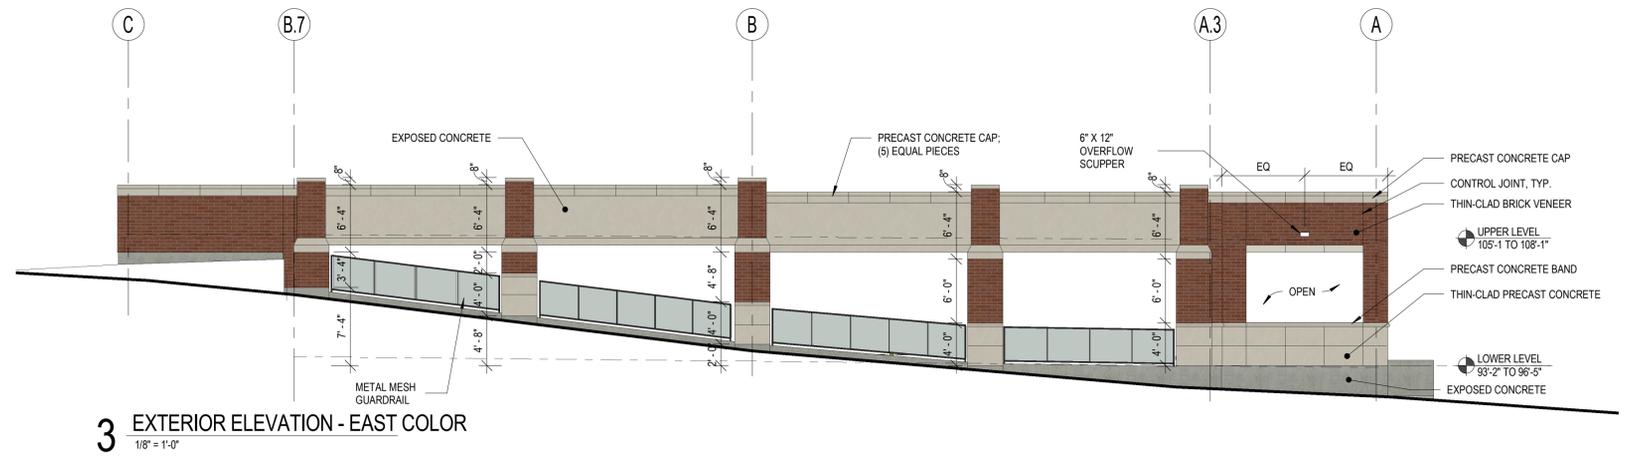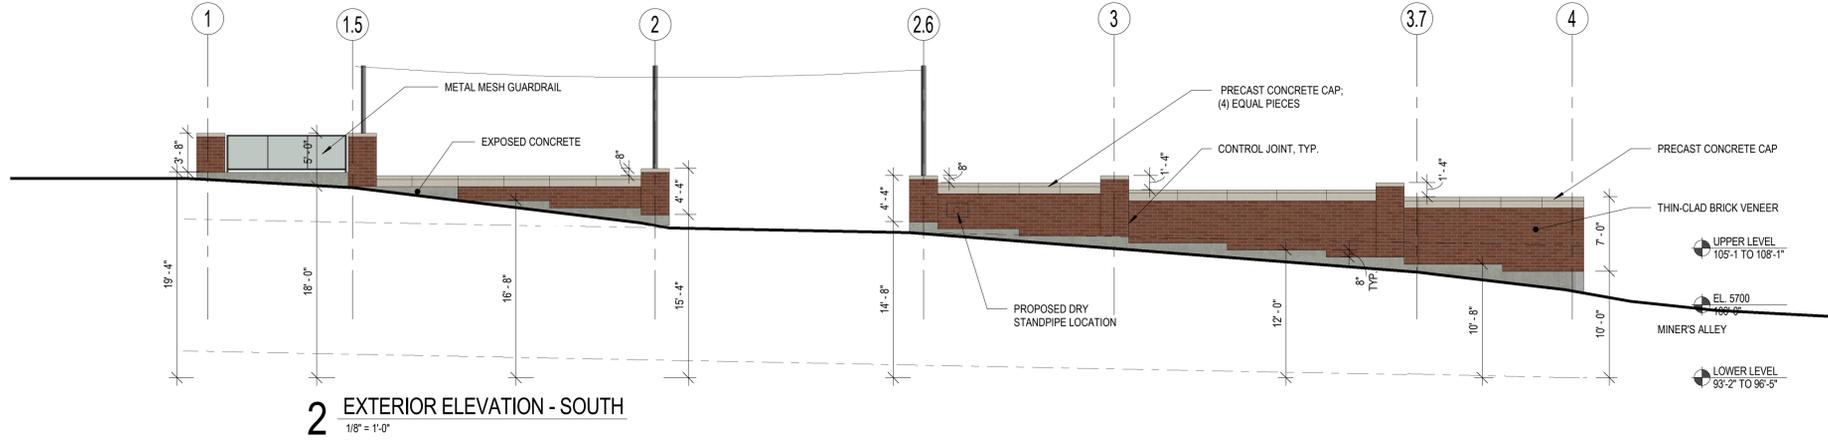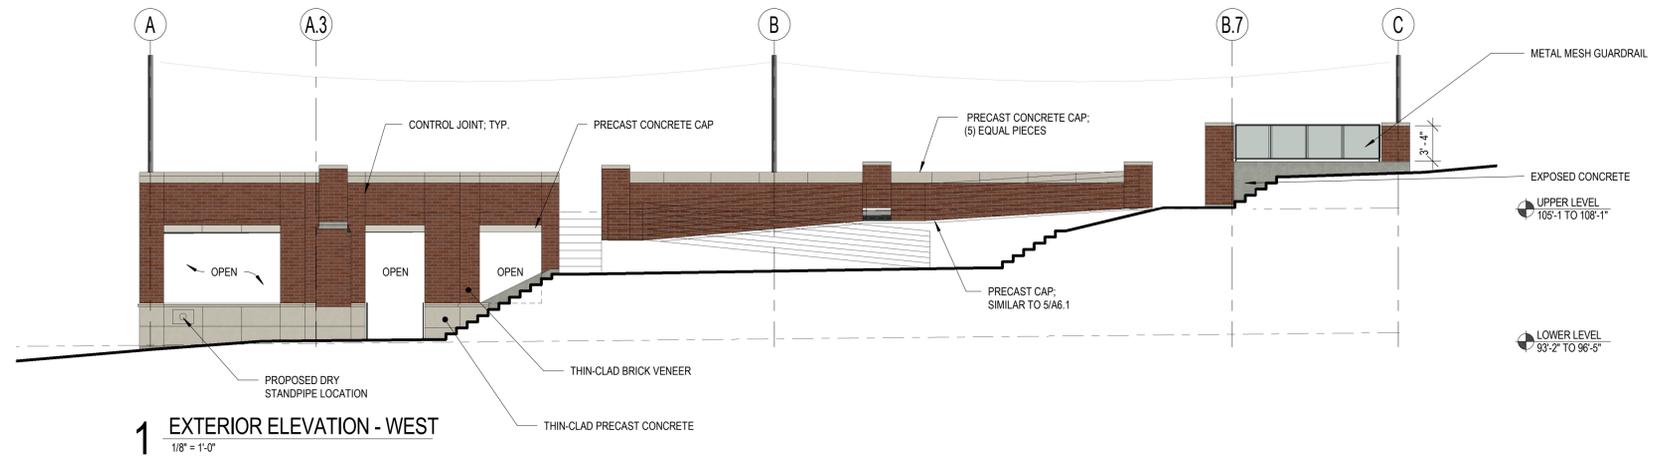

CALVARY EPISCOPAL CHURCH
 CELEBRATION PLAZA / PARKING STRUCTURE
 818 14th STREET
 GOLDEN, CO 80401

ISSUE	DATE	DESCRIPTION
1	02.02.2018	SDP
2	03.26.2018	SDP RESUBMITTAL

DRAWN BY: SG CHECKED BY: JM
 PROJECT NO.: 1715 CP INITIAL DATE: APRIL 2017

ARCHITECTURAL
 ELEVATIONS

A1.0